

PUBLIC UTILITIES COMMISSION
505 Van Ness Avenue
San Francisco CA 94102-3298



Pacific Gas & Electric Company
ELC (Corp ID 39)
Status of Advice Letter 7076E
As of January 11, 2024

Subject: Clean-Up of Electric Rate Schedule NEM2

Division Assigned: Energy

Date Filed: 11-22-2023

Date to Calendar: 11-29-2023

Authorizing Documents: None

Disposition:	Accepted
Effective Date:	11-22-2023

Resolution Required: No

Resolution Number: None

Commission Meeting Date: None

CPUC Contact Information:

edtariffunit@cpuc.ca.gov

AL Certificate Contact Information:

Kimberly Loo

(279)789-6209

PGETariffs@pge.com

PUBLIC UTILITIES COMMISSION
505 Van Ness Avenue
San Francisco CA 94102-3298



To: Energy Company Filing Advice Letter

From: Energy Division PAL Coordinator

Subject: Your Advice Letter Filing

The Energy Division of the California Public Utilities Commission has processed your recent Advice Letter (AL) filing and is returning an AL status certificate for your records.

The AL status certificate indicates:

- Advice Letter Number
- Name of Filer
- CPUC Corporate ID number of Filer
- Subject of Filing
- Date Filed
- Disposition of Filing (Accepted, Rejected, Withdrawn, etc.)
- Effective Date of Filing
- Other Miscellaneous Information (e.g., Resolution, if applicable, etc.)

The Energy Division has made no changes to your copy of the Advice Letter Filing; please review your Advice Letter Filing with the information contained in the AL status certificate, and update your Advice Letter and tariff records accordingly.

All inquiries to the California Public Utilities Commission on the status of your Advice Letter Filing will be answered by Energy Division staff based on the information contained in the Energy Division's PAL database from which the AL status certificate is generated. If you have any questions on this matter please contact the:

Energy Division's Tariff Unit by e-mail to
edtariffunit@cpuc.ca.gov

November 22, 2023

Advice 7076-E

(Pacific Gas and Electric Company ID U 39 E)

Public Utilities Commission of the State of California

Subject: Clean-Up of Electric Rate Schedule NEM2

Purpose

Pacific Gas and Electric Company (PG&E) hereby submits for revisions to Electric Rate Schedule NEM2. The affected tariff sheets are listed on the enclosed Attachment 1.

Background

The purpose of this advice letter is to revise Electric Rate Schedule NEM2 in PG&E's tariff book to consolidate language that was approved in multiple advice letters and to add clarifying language.

On November 5, 2021, PG&E submitted Tier 2 Advice Letter (AL) 6395-E to update the Applicability and Special Condition requirements for transitions to the NEM successor tariff. On November 2, 2023, the California Public Utilities Commission (CPUC) issued a Disposition Letter approving AL 6395-E with an effective date of December 5, 2021.¹

On September 7, 2022, PG&E submitted Tier 2 Supplemental AL 6395-E-B to provide additional information and clarification to original AL 6395-E, as well as update Sheet 26 of NEM2. On November 2, 2023, the CPUC issued a Disposition Letter approving AL 6395-E-B, alongside its original advice letter, AL 6395-E, with an effective date of December 5, 2021.²

On September 19, 2022, PG&E submitted Tier 2 Supplemental AL 6682-E-A to update NEM2 in compliance with Decision (D.) 22-07-001. This supplemental advice letter replaced original AL 6682-E in its entirety. On March 14, 2023, the CPUC issued a Disposition Letter approving AL 6682-E-A with an effective date of February 28, 2023.³

¹ https://www.pge.com/tariffs/assets/pdf/adviceletter/ELEC_6395-E.pdf

² https://www.pge.com/tariffs/assets/pdf/adviceletter/ELEC_6395-E-B.pdf

³ https://www.pge.com/tariffs/assets/pdf/adviceletter/ELEC_6682-E-A.pdf

On March 17, 2023, PG&E submitted Tier 2 Supplemental AL 6847-E-A to update NEM2 in compliance with D.22-12-056. This supplemental replaced a couple revised sheets of NEM2 from original AL 6847-E, submitted on January 30, 2023. On April 13, 2023, the CPUC issued a Disposition Letter approving AL 6847-E and AL 6847-E-A with an effective date of March 1, 2023.⁴

In addition to consolidating language from the above advice letters, PG&E is also including clarifying language to NEM2 to make updates that are consistent with current practices. Since the advice letters that revised NEM2 were pending at the same time, then approved at different times, some information has been updated. For your convenience, PG&E has included redline revisions in Attachment 2.

The submittal would not increase any current rate or charge, cause the withdrawal of service, or conflict with any rate schedule or rule.

Protests

Anyone wishing to protest this submittal may do so by letter sent electronically via E-mail, no later than December 12, 2023, which is 20 days after the date of this submittal. Protests must be submitted to:

CPUC Energy Division
ED Tariff Unit
E-mail: EDTariffUnit@cpuc.ca.gov

The protest shall also be electronically sent to PG&E via E-mail at the address shown below on the same date it is electronically delivered to the Commission:

Sidney Bob Dietz II
Director, Regulatory Relations
c/o Megan Lawson
E-mail: PGETariffs@pge.com

Any person (including individuals, groups, or organizations) may protest or respond to an advice letter (General Order 96-B, Section 7.4). The protest shall contain the following information: specification of the advice letter protested; grounds for the protest; supporting factual information or legal argument; name and e-mail address of the protestant; and statement that the protest was sent to the utility no later than the day on which the protest was submitted to the reviewing Industry Division (General Order 96-B, Section 3.11).

⁴ https://www.pge.com/tariffs/assets/pdf/adviceletter/ELEC_6847-E-A.pdf

Effective Date

Pursuant to General Order (GO) 96-B, Rule 5.1, PG&E requests that this Tier 1 advice submittal become effective on November 22, 2023.

Notice

In accordance with General Order 96-B, Section IV, a copy of this advice letter is being sent electronically to parties shown on the attached list. Address changes to the General Order 96-B service list should be directed to PG&E at email address PGETariffs@pge.com. For changes to any other service list, please contact the Commission's Process Office at (415) 703-2021 or at Process_Office@cpuc.ca.gov. Send all electronic approvals to PGETariffs@pge.com. Advice letter filings can also be accessed electronically at: <http://www.pge.com/tariffs/>.

_____/S/

Sidney Bob Dietz II
Director, Regulatory Relations
CPUC Communications

Attachments

- Attachment 1 – Tariffs
- Attachment 2 – Redline Tariff Revisions



ADVICE LETTER SUMMARY

ENERGY UTILITY



MUST BE COMPLETED BY UTILITY (Attach additional pages as needed)

Company name/CPUC Utility No.: Pacific Gas and Electric Company (ID U39 E)

Utility type:

- ELC GAS WATER
 PLC HEAT

Contact Person: Kimberly Loo

Phone #: (279)789-6209

E-mail: PGETariffs@pge.com

E-mail Disposition Notice to: KELM@pge.com

EXPLANATION OF UTILITY TYPE

ELC = Electric GAS = Gas WATER = Water
 PLC = Pipeline HEAT = Heat

(Date Submitted / Received Stamp by CPUC)

Advice Letter (AL) #: 7076-E

Tier Designation: 1

Subject of AL: Clean-Up of Electric Rate Schedule NEM2

Keywords (choose from CPUC listing): Compliance

AL Type: Monthly Quarterly Annual One-Time Other:

If AL submitted in compliance with a Commission order, indicate relevant Decision/Resolution #:

Does AL replace a withdrawn or rejected AL? If so, identify the prior AL: No

Summarize differences between the AL and the prior withdrawn or rejected AL:

Confidential treatment requested? Yes No

If yes, specification of confidential information:

Confidential information will be made available to appropriate parties who execute a nondisclosure agreement. Name and contact information to request nondisclosure agreement/ access to confidential information:

Resolution required? Yes No

Requested effective date: 11/22/23

No. of tariff sheets: 47

Estimated system annual revenue effect (%): N/A

Estimated system average rate effect (%): N/A

When rates are affected by AL, include attachment in AL showing average rate effects on customer classes (residential, small commercial, large C/I, agricultural, lighting).

Tariff schedules affected: See Attachment 1

Service affected and changes proposed¹: N/A

Pending advice letters that revise the same tariff sheets: N/A

¹Discuss in AL if more space is needed.

Protests and correspondence regarding this AL are to be sent via email and are due no later than 20 days after the date of this submittal, unless otherwise authorized by the Commission, and shall be sent to:

California Public Utilities Commission
Energy Division Tariff Unit Email:
EDTariffUnit@cpuc.ca.gov

Contact Name: Sidnev Bob Dietz II. c/o Megan Lawson
Title: Director, Regulatory Relations
Utility/Entity Name: Pacific Gas and Electric Company

Telephone (xxx) xxx-xxxx:
Facsimile (xxx) xxx-xxxx:
Email: PGETariffs@pge.com

Contact Name:
Title:
Utility/Entity Name:

Telephone (xxx) xxx-xxxx:
Facsimile (xxx) xxx-xxxx:
Email:

CPUC
Energy Division Tariff Unit
505 Van Ness Avenue
San Francisco, CA 94102

Clear Form

Cal P.U.C. Sheet No.	Title of Sheet	Cancelling Cal P.U.C. Sheet No.
56723-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 1	54757-E
56724-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 2	
56725-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 3	54085-E
56726-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 4	54086-E
56727-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 5	
56728-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 6	50675-E
56729-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 7	55079-E
56730-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 8	54087-E
56731-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 9	
56732-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 10	55080-E
56733-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 11	55081-E
56734-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 12	51945-E
56735-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 13	51946-E
56736-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 14	51947-E

Cal P.U.C. Sheet No.	Title of Sheet	Cancelling Cal P.U.C. Sheet No.
56737-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 15	51948-E
56738-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 16	55406-E
56739-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 17	55407-E
56740-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 18	55763-E
56741-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 19	55409-E
56742-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 20	55410-E
56743-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 21	55411-E
56744-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 22	55412-E
56745-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 23	55413-E
56746-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 24	55414-E
56747-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 25	55415-E
56748-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 26	55416-E
56749-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 27	55417-E
56750-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 28	55418-E

Cal P.U.C. Sheet No.	Title of Sheet	Cancelling Cal P.U.C. Sheet No.
56751-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 29	55419-E
56752-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 30	55420-E
56753-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 31	55764-E
56754-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 32	55422-E
56755-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 33	55423-E
56756-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 34	55424-E
56757-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 35	55425-E
56758-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 36	55426-E
56759-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 37	55427-E
56760-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 38	55428-E
56761-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 39	55429-E
56762-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 40	55430-E
56763-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 41	55431-E
56764-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 42	55432-E

Cal P.U.C. Sheet No.	Title of Sheet	Cancelling Cal P.U.C. Sheet No.
56765-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 43	55433-E
56766-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 44	55434-E
56767-E	ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE Sheet 45	55435-E
56768-E	ELECTRIC TABLE OF CONTENTS Sheet 1	56645-E
56769-E	ELECTRIC TABLE OF CONTENTS Sheet 6	56616-E



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 1

APPLICABILITY: Pursuant to Decision (D.) 22-12-056, this Schedule is closed to new customers with applications submitted after April 14, 2023 unless the customer is applying for Load Aggregation (NEM2A), as detailed in Special Condition 6. Notwithstanding the foregoing, and except for Load Aggregation customers, customers applying on or after April 15, 2023, but before the Net Billing Tariff (NBT) adopted by that decision is approved, may apply for interconnection under this Schedule subject to the terms of Special Condition 11. Customers applying before April 15, 2023, are subject to the application requirements specified in Special Condition 3 (Interconnection) to maintain eligibility on NEM2. (T)

This net energy-metering schedule pursuant to Decision (D.) 16-01-044 is applicable to a customer who takes service on an applicable time-of-use (TOU) rate schedule^{1,2} and who uses a Renewable Electrical Generation Facility (REGF) as defined below that is located on the customer's owned, leased, or rented premises, is interconnected and operates in parallel with PG&E's transmission and distribution systems, and is intended primarily to offset part or all of the customer's own electrical requirements (hereinafter "eligible customer-generator" or "customer"). For a NEM REGF paired with storage, see Special Condition 9.

A REGF greater than one megawatt seeking interconnection with PG&E's transmission system under this Rate Schedule that is not subject to one of the exceptions described in Electric Tariff Rule 21 Section B.1 (Applicability) shall interconnect in accordance with the instructions provided there. Such customers shall also apply via PG&E's online application portal (YourProject) for the purpose of initiating an application and determining eligibility of their REGF under this Schedule. This requirement is not applicable to such REGFs with Permission to Operate letters received as of May 6, 2022, or proposed REGFs with materially complete interconnection applications submitted as of May 6, 2022. (T)

Notwithstanding the definition of "eligible customer-generator" above, eligible customer generator also includes (i) the California Department of Corrections and Rehabilitation (CDCR) pursuant to Special Condition 7 of this tariff.

Subject to the requirements of Special Condition 6, Load Aggregation to determine the customer's own electrical requirements is permitted. Certain incremental billing and metering costs set forth in this schedule that are related to net energy metering are applicable to Electric Service Providers (ESPs) serving eligible customer-generators. (L)

¹ Customers on Schedules such as ET, ES, and ESR, which have no corresponding TOU Rate, are not required to switch to TOU rates, unless and until such a rate becomes available.

² Customers, including those on Load Accounts on NEMA as described in Special Condition 6, switching from Schedule NEM to this NEM2 tariff are required to take any applicable TOU rate, beginning at the time the customer switches to the NEM2 tariff, pursuant to D.14-03-041 and D. 16-01-044. (T)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 2

APPLICABILITY
(Cont'd):

Pursuant to Decision 22-08-024, the Plug-in Electric Vehicle (PEV) Submetering Protocol is not extended to NEM customers at this time.

This service is not applicable to a Direct Access (DA) customer where the customer's ESP does not offer a net energy metering tariff. In addition, if the tariffs for the customer's ESP do not permit Load Aggregation, as described in Special Condition 6, this option is not available to the DA customer. In addition, if an eligible customer-generator participates in direct transactions with an ESP that does not provide distribution service for the direct transactions, the ESP, and not PG&E, is obligated to provide net energy metering to the customer.

This rate schedule is available to customers that provide PG&E with:

- (a) a completed, signed Net Energy Metering Application and Interconnection Agreement as described in Special Condition 3 including all supporting documents and required payments; AND
- (b) evidence of the customer's final inspection clearance from the governmental authority having jurisdiction over the REGF,

See Special Condition 8 for NEM2 Legacy Provisions.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 3

APPLICABILITY: Customers seeking generator interconnections in portions of San Francisco and
(Cont'd.) Oakland where PG&E has a network grid must contact PG&E about generation export limitations.

(L)

A REGF means a generating facility that generates electricity by using:

- a) biomass,
- b) solar thermal,
- c) photovoltaic,
- d) wind,
- e) geothermal,
- f) fuel cells using renewable fuels,
- g) small hydroelectric generation (but a small hydroelectric generation facility is not an eligible REGF if it will cause an adverse impact on instream beneficial uses or cause a change in the volume or timing of streamflow),
- h) digester gas,
- i) municipal solid waste conversion,
- j) landfill gas,
- k) ocean wave,
- l) ocean thermal, or
- m) tidal current,

and any additions or enhancements to the facility using that technology pursuant to paragraph (1) of subdivision (a) of Section 25741 of the Public Resources Code. These renewable sources are defined in the latest version of the California Energy Commission's (CEC's) Renewables Portfolio Standard (RPS) Eligibility Guidebook and the Overall Program Guidebook.³

Schedule NEM2 applies also to specified net energy metering eligible (NEM2-eligible) generators in a REGF comprised of multiple NEM2- and non-NEM2-eligible generators, served through the same Point of Common Coupling (PCC), where the NEM2-eligible generating capacity sized to customer load and in the case of the CDCR, for CDCR accounts also satisfies Special Condition 7, respectively. Such facilities will be referred to as Multiple Tariff Facilities, and any group of generators within such a facility that is subject to the same tariff provisions for billing and metering purposes will be referred to as a Constituent Generator Group. In order to be eligible for this rate schedule in a Multiple Tariff Facility, the customer-generator must meet all the requirements of Special Condition 4 for the schedule NEM2-eligible generator, and must also meet any other applicable tariffs.

³ The RPS Guidebooks can be found at: <https://www.energy.ca.gov/programs-and-topics/programs/renewables-portfolio-standard>

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 4

APPLICABILITY: Due to the complexity of Load Aggregation Arrangements and/or Multiple Tariff Facilities NEM2 generating facilities interconnecting under the provisions of Special Conditions 4 and 6 may require additional review and/or interconnection facilities and other equipment, and may incur interconnection costs, as provided for in electric Rule 21*. (L)

(Cont'd.) All Customers with Renewable Electrical Generation Facilities larger than 1 MW are subject to interconnection, Network and/or Distribution upgrade costs in accordance with Rule 21*. (L)

Change of Party for 30 kW or less or customer transitioning to Schedule NEM2 from NEM: (T)/(L)
(T)/(L)

(i) A Customer who owns, rents or leases a premises that includes solar and/or wind turbine electrical generating facilities, or a hybrid of both with a capacity of 30 kW or less, that was approved by PG&E for NEM2 interconnection prior to the Customer moving in and/or taking electric service with PG&E (Change of party Customer); or (T)/(L)
(L)

(ii) A Customer that was previously approved by PG&E for NEM interconnection but is transitioning to the NEM2 Rate Schedule as described in the NEM tariff (NEM Transition Eligible Customer); or (T)

(iii) A Customer that was previously approved by PG&E for NEM interconnection but who has voluntarily enrolled on Schedule NEM2 from NEM (NEM Voluntary Transition Customer) (T)

will take service on this tariff (or other appropriate tariffs as determined by the Commission) as long as the requirements of the section below (regarding tariff compliance and release of information) are met. Any type of REGF other than either a solar and/or wind turbine electrical generating facilities, or a hybrid of both with a capacity of 30 kW or less, may at PG&E's request be required to complete and submit to PG&E a new NEM2MT Interconnection Agreement as indicated in Special Condition 3 and/or Affidavit (Appendix C). (L)
(T)/(L)
(L)

The Change of party Customer, NEM Transition Eligible Customer or NEM Voluntary Transition Customer will not be required to upgrade their generating facility if they have met all interconnection standards and received permission to operate for the generator currently in place. (T)

(L)
|
(L)

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission. (L)
(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 5

APPLICABILITY: All Customers must:
(Cont'd.)

1) Ensure that the generating facility is compliant with all applicable safety and performance standards as delineated in PG&E's Electric Rule 21 and other applicable tariffs*; (T)/(L)
(L)
(L)

2) Accept that PG&E may from time to time release to the California Energy Commission, the California Public Utilities Commission, and/or other state Agencies information regarding the Customer's, NEM Transition Eligible Customer's or NEM Voluntary Transition Customer's facility, including such Customer's name and REGF location, capacity and operational characteristics. Furthermore, as a condition of receiving service under this tariff, pursuant to CPUC Decisions 14-11-001 and 21-06-026, PG&E is required to provide certain data, including, but not limited to, confidential customer information, to the CPUC, its contractors, the California Department of Consumer Affairs Contractors State License Board, and the California Department of Financial Protection & Innovation. Customer authorizes PG&E to release any and all information provided in the Net Energy Metering Application for interconnection to the entities identified above without further notification or consent. (T)/(L)
(L)
(T)/(L)
(L)

Change of party Customers, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers with solar and/or wind turbine electrical generating facilities up to 30 kW making any modification to the generating facility are not eligible for this provision. These generators and solar and/or wind electric generating facilities over 30 kW and all other REGF are not eligible for this provision and must complete the interconnection process in Special Condition 3 of this tariff. (T)/(L)
(L)
(L)

Change of party Customers, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers making any Material Modification (pursuant to Rule 21) to previously approved PG&E NEM solar and/or wind turbine electrical generating facilities or other Renewable Electrical Generation Facility are not eligible for this provision and must, where required by Rule 21, complete the interconnection process in Special Condition 3 of this tariff. (T)
(L)
(T)

Change of party Customers, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers also must agree to comply with all rules and requirements of this and other applicable tariffs. (T)/(L)
(T)/(L)
(L)

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission. (L)
(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 6

APPLICABILITY: (Cont'd.) When the builder/developer of a subdivision sells a new home during the NEM2 application process, after the builder/developer completes the Net Energy Metering Application and Interconnection Agreement and otherwise meets all of PG&E's requirements for the NEM2 project, but prior to PG&E providing final written approval for Parallel Operation on Schedule NEM2, PG&E may treat the new home owner/Customer as a Change of-party Customer, as defined above

(L)

Demand Response Programs: For Load Aggregation pursuant to Special Condition 6, Aggregated Accounts, including the Generating Account, are eligible for the same demand response programs and solar tariffs as NEM2 customers. Demand response payments to Aggregated Accounts will be based on the Qualified Customer's metered usage disregarding any contributions allocated from the Generating Account. Similarly, any other demand response programmatic elements that are affected by a customer's load (e.g., program eligibility) shall also exclude from consideration any impacts of Generator Account generation. Any payments for demand response will be limited to the customer's load, and not include excess generation exported to the grid.

TERRITORY: The entire territory served.

RATES: All rates charged under this schedule will be in accordance with the eligible customer-generator's PG&E otherwise-applicable metered rate schedule (OAS). An eligible customer-generator served under this schedule is responsible for all charges from its OAS including monthly minimum charges, customer charges, meter charges, facilities charges, demand charges and surcharges. The "Average Rate Limiter" for general service OAS's and all other demand charges will be based on the demand in kilowatts as measured only on the energy being consumed by the customer from PG&E. The power factor, when it applies on the OAS, will be based on the energy consumed by the customer-generator from PG&E and the average power factor over the past 12 billing months of operation prior to starting on NEM2. Customer-generators without 12 billing months of power factor history, will have their power factor estimated based on the nature of the connected facilities and their hours of operation. Power factor will be subsequently applied to the customer-generator's bill until the customer-generator demonstrates to PG&E's satisfaction that adequate correction had been provided. PG&E will continue to monitor and review the power factor and if warranted, change the power factor correction on the customer-generator's bills. Charges for energy (kWh) supplied by PG&E, ESP or Community Choice Aggregator (CCA), as applicable, will be calculated in accordance with Billing (Special Condition 2, below).

For PG&E customer-generators, the energy charges will be in accordance with the customer-generator's OAS. For ESP or CCA customer-generators being billed Consolidated PG&E Billing service, the ESP or CCA is responsible for providing the billing information regarding the applicable generation-related bill charges or credits to PG&E on a timely basis.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 7

RATES:
(Cont'd.)

Customer-generators eligible for service under this schedule are exempt from the requirements of Schedule SB—Standby Service, except Multiple Tariff Facilities interconnected under the terms of Special Condition 4 may be subject to the requirements of Schedule SB.

The charges and credits for Multiple Tariff Facilities taking service on this rate schedule under the provisions of Special Condition 4, will be calculated using the applicable OAS identified by the customer-generator in its application for interconnection and its interconnection agreement with PG&E or as subsequently changed by the customer-generator in accordance with PG&E's electric Rule 12.

Existing customer-generators being billed under sub-schedules NEM2S, NEM2EXP, NEM2EXPM, or NEM2A who only add storage and are eligible to use the estimation methodology described in Special Condition 9 ("NEM Paired Storage") will be billed using the estimation methodology as of their scheduled True-Up, provided that a True-Up is not required for any other reason. All other customer-generators with Multiple Tariff Facilities or NEM Paired Storage with existing NEM2 eligible generators or storage interconnecting additional generators, will receive a bill true-up prior to taking service under Special Condition 4. This ensures that all NEM2 accounts have the same Relevant Period, as defined in Special Condition 2, going forward.

Residential Customers on this tariff, who are:

- i. the first customer who installs the REGF (that is, second or subsequent owners are not eligible) and
- ii. required to take TOU rates prior to the implementation of default TOU rates for all residential customers, and
- iii. on any TOU rate (including a TOU pilot rate) prior to the implementation of default residential TOU rates,

have the option to stay on that TOU rate for a period of five years from the date the customer commences the TOU rate.

PG&E rates and rate design, including the rates and rate design reflected in this Tariff, are subject to change from time to time. Customers should take this into consideration when making any long term decisions based on rate structures that are currently in place.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 8

- SUB-SCHEDULES: Eligible customer-generators will be placed on the appropriate sub-schedule as described below: (L)
1. NEM2S – For Small Customer (as defined in Rule 1) customer-generators taking service with solar and/or wind generating facilities of 30 kilowatts or less.
 2. NEM2EXP – For Small Customer (as defined in Rule 1) customer-generators with (i) solar and/or wind generating facilities of 1,000 kilowatts or less, other than facilities of 30 kilowatts or less, or (ii) any other REGF of 1,000 kilowatts or less.
 3. NEM2EXPM – For all other commercial, industrial customer-generators, and agricultural customers billed monthly under Special Condition 2.
 4. NEM2MT – For customer-generators taking service as a Multiple Tariff Facility under Special Condition 4 of this tariff.
 5. NEM2A – For a customer-generator with a Load Aggregation Arrangement pursuant to Special Condition 6 of this tariff.
 6. NEM2CDCR – For a CDCR customer-generator pursuant to Special Condition 7. (L)
- SPECIAL CONDITIONS: 1. METERING*: Customers going on this tariff must have metering and data communication capabilities necessary to render accurate bills under NEM2. Multiple Tariff Facilities will be metered under one of the options described in Special Condition 4. All other net energy metering shall be accomplished using a single meter capable of separately registering the flow of electricity in two directions (imports and exports), and capable of metering intervals required for billing under NEM2. Data communication capabilities must meet PG&E's requirements for transferring usage data to PG&E for billing. (T)/(L)
(T)/(L)
(L)
(L)
(T)/(L)
- If the eligible customer-generator's existing electrical meter does not meet the requirements described in paragraph 1 above of Special Condition 1, the eligible customer-generator shall be responsible for all expenses involved in purchasing and installing an acceptable meter with data communication capabilities required to enable accurate billing under NEM2. (T)/(L)
- (L)
- (L)
- *There may be additional metering requirements under Rule 21 Section B.1 Applicability regarding net energy metering NEM-2 projects greater than 1 MW interconnecting on Transmission. (L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 9

SPECIAL
CONDITIONS
(Cont'd):

1. METERING: (Cont'd.)

If none of the metering and data communication options available to PG&E that are necessary to render accurate billing under NEM2 requirements are acceptable to the customer-generator, PG&E shall have the right to refuse interconnection for new customers. For NEM Transition Eligible Customers, if none of the metering options available to PG&E that are necessary to render accurate billing under NEM2 requirements are acceptable to the customer-generator, PG&E shall reserve the right to transition such customers to a Rule 21 Uncompensated Export arrangement instead of NEM2. Under a Rule 21 Uncompensated Export arrangement, the customer may incur departing load and standby charges, if applicable. Customers who will be transitioned to Rule 21 Uncompensated Export may require updated meter programming to allow for accurate billing under Rule 21. Per Electric Rule No. 16 Section A.12, customers are required to provide PG&E access to metering equipment for such purposes. If a customer refuses to grant access to PG&E, such customer's permission to operate (PTO) under NEM will terminate and such customer will need to disconnect their generating facility from the grid. PG&E reserves the right to disconnect the customer's service if customer does not comply with PG&E rules within a reasonable period of time.

(T)/(L)

If PG&E is unable to provide metering required for NEM2 billing for either new or NEM Transition Eligible customers, PG&E shall have the option, but not an obligation, to provide an estimation methodology for such customers.

(T)/(L)

Customer-generators with Load Aggregation Arrangements will need metering on the Generating Account capable of separately measuring imports and exports in a manner commensurate with the smallest time interval used by PG&E to establish billing determinates for any of the Aggregated Account meters. If a newly installed REGF can use the existing metering, the metering charges will be based on applicable meter charges in the Generating Account TOU OAS; if a new meter is requested by the customer for a new service as allowed in Special Condition 3, it must be installed at the customer's expense as a Special Facility using incremental costs, pursuant to Section 1, Electric Rule 2.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 11

SPECIAL
CONDITIONS:
(Cont'd.)

2. BILLING: (Cont'd.)

(L)

b. For an OAS with Time of Use (TOU):

If the eligible customer-generator is a net consumer during any discrete TOU period, the net kWh consumed shall be billed in accordance with that same TOU period in the eligible customer-generator's OAS except for the NBC calculation addressed in 2.c.

If the eligible customer-generator is a net generator during any discrete TOU period, the net kWh produced shall be valued at the same price per kWh at the same TOU period in the eligible customer generator's OAS. For NEM Paired Storage, net generation will be calculated as described in Special Condition 9, Section c. as applicable.

In the event that at the end of the monthly billing cycle, an eligible customer-generator's net usage for all TOU periods totals zero (i.e. net generation in one or more periods exactly offsets the net usage in all other periods) except for the NBC calculation addressed in 2.c, then the value of usage and/or generation will be calculated using Tier 1 rates (as set forth in the OAS).

If the eligible customer-generator is being served under DA or CCA Service, ESP or CCA charges will be specified by their ESP or CCA in accordance with the eligible customer-generator's OAS and PG&E's Direct Access or Community Choice Aggregation tariffs. Applicable PG&E charges or credits will be valued as described in this Special Condition 2.

For a DA or CCA Service customer-generator, Generation Rate Component credits, if any, do not reduce the charges owed to PG&E for energy supplied to the eligible customer-generator including the NBC calculation addressed in 2.c.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 12

SPECIAL
CONDITIONS:
(Cont'd.)

2. BILLING: (Cont'd.)

(L)

a. For an OAS with Baseline Rates (Cont'd):

If the eligible customer-generator is a net generator, the net kWh generated shall be valued at the rate for the kWh up to the baseline quantity, with any excess kWh generated, valued at the rate for the appropriate tier level in which the equivalent kWh of usage would fall. These credits, if any, do not reduce the charges from the NBC calculation addressed in 2.c.

If the eligible customer-generator is being served under DA or CCA Service, ESP or CCA charges will be specified by their ESP or CCA in accordance with the eligible customer-generator's OAS and PG&E's Direct Access or Community Choice Aggregation tariffs. Applicable PG&E charges or credits will be valued as described in this Special Condition 2.

For a DA or CCA Service customer-generator, Generation Rate Component credits, if any, do not reduce the charges owed to PG&E for energy supplied to the eligible customer-generator, nor do they reduce the NBC calculation in 2.c.

b. For an OAS with Time of Use (TOU):

If the eligible customer-generator is a net consumer during any discrete TOU period, the net kWh consumed shall be billed in accordance with that same TOU period in the eligible customer-generator's OAS except for the NBC calculation addressed in 2.c.

If the eligible customer-generator is a net generator during any discrete TOU period, the net kWh produced shall be valued at the same price per kWh at the same TOU period in the eligible customer generator's OAS. For NEM Paired Storage, net generation will be calculated as described in Special Condition 9, Section g. as applicable.

In the event that at the end of the monthly billing cycle, an eligible customer-generator's net usage for all TOU periods totals zero (i.e. net generation in one or more periods exactly offsets the net usage in all other periods) except for the NBC calculation addressed in 2.c, then the value of usage and/or generation will be calculated using Tier 1 rates (as set forth in the OAS).

If the eligible customer-generator is being served under DA or CCA Service, ESP or CCA charges will be specified by their ESP or CCA in accordance with the eligible customer-generator's OAS and PG&E's Direct Access or Community Choice Aggregation tariffs. Applicable PG&E charges or credits will be valued as described in this Special Condition 2.

For a DA or CCA Service customer-generator, Generation Rate Component credits, if any, do not reduce the charges owed to PG&E for energy supplied to the eligible customer-generator including the NBC calculation addressed in 2.c.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 13

SPECIAL
CONDITIONS:
(Cont'd.)

2. NET ENERGY METERING AND BILLING: (Cont'd.)

(L)

c. Non-Bypassable Charges

Customers on this tariff must pay the non-bypassable charges specified in D.16-01-044 and Resolution E-4792 in each metered interval for each kilowatt-hour of electricity they consume from the grid. The relevant non-bypassable charges are Public Purpose Program, Nuclear Decommissioning Charge, Competition Transition Charge, and Wildfire Fund Charge (NBCs). These charges may not be reduced by any credits for exports to the grid as calculated in 2.a and 2.b. NBCs shall be assessed only on the kilowatt hours consumed in each metered interval net of exports.

d. For an OAS with Minimum Charges:

Eligible customer-generators taking service on a residential OAS, that are billed annually for net energy consumed, shall owe only the delivery minimum bill amount monthly, which shall be assigned as distribution revenue. The energy (kWh) related component shall be treated in the same manner as energy (kWh) consumed, as described in Special Condition 2.h below, unless otherwise provided for in the customer-generator's OAS.

e. For a customer-generator electing Load Aggregation:

For each monthly billing period, the energy (kWh) exported to the grid (in kilowatt-hours or kWh) by the Renewable Electrical Generation Facility shall be allocated to each of the Aggregated Account meters (kWh reading), as well as the Generating Account if it has load, based on the cumulative usage at each aggregated account and the cumulative generation from the generating account from the start of the Relevant Period. At the end of the month, once the allocation proportions are known, the kWh for each Generating Account meter interval will be allocated to each of the Aggregated Accounts for the corresponding interval. NBCs will apply to the load accounts based on their full metered usage.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 14

SPECIAL
CONDITIONS:
(Cont'd.)

2. NET ENERGY METERING AND BILLING: (Cont'd.)

(L)

e. For a customer-generator electing Load Aggregation: (Cont'd)

Once the kWh is allocated to an eligible customer-generator's Aggregated Account, that account will be treated in accordance with 2.a, 2.b, and/or 2.c above, as applies to the rate schedule on which the Aggregated Account takes service. The Generating Account will also be treated as an Aggregated Account in months where it has net load.

f. Payment Options:

Eligible Small Customer (as defined in Rule 1) customer generators may pay monthly or annually for the net energy (kWh) consumed. For all other commercial, industrial, and agricultural customers, the net balance of all moneys owed must be paid on each monthly billing cycle; when they are a net electricity producer over a monthly billing cycle, the value of any excess kilowatt-hours generated during the billing cycle shall be carried over to the following billing period and appear as a credit on the customer generator's account, until the end of the Relevant Period.

Aggregated Accounts, including the Generating Account in a Load Aggregation Arrangement must pay monthly for energy consumed.

g. Relevant Period:

A Relevant Period consists of any twelve monthly billing cycles commencing on the date PG&E provides the Customer-Generator with PG&E's written approval to begin parallel operation of the REGF for purposes of participating in NEM2, and on every subsequent anniversary thereof. If an eligible customer-generator terminates service, or experiences a change in ESP or CCA prior to the end of any 12 monthly billing cycles the Relevant Period will consist of that period from the anniversary date until the effective date of that termination or ESP or CCA change.

For Load Aggregation, the Generating Account and all Aggregated Accounts will have the same billing cycle and Relevant Period, based on the interconnection date, or Anniversary thereof as described earlier in this paragraph. However, if an Aggregated Account terminates service, or experiences a change in ESP or CCA prior to the end of any 12 monthly billing cycles, its Relevant Period will consist of that period from the anniversary date until the effective date of that termination or ESP or CCA change. If an Aggregated Account is subsequently added, its Relevant Period will consist of that period from its effective date of inclusion in Load.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 15

SPECIAL
CONDITIONS:
(Cont'd.)

2. NET ENERGY METERING AND BILLING: (Cont'd.)

(L)

h. Energy True Up:

Net energy is defined as measuring the difference between the energy (kWh) supplied by PG&E, ESP or CCA, as applicable, through the electric grid to the eligible customer-generator and energy (kWh) generated by an eligible customer-generator and fed back into the electric grid over a Relevant Period.

For an Aggregated Account, (including a Generating Account) Net Energy is defined as measuring the difference between the energy (kWh) supplied by PG&E, ESP or CCA, as applicable, through the electric grid to the eligible customer-generator and the total energy (kWh) allocated to that Aggregated Account over a Relevant Period.

A true up is performed by PG&E and/or ESP or CCA, as applicable, at the end of each Relevant Period following the date the customer-generator was first eligible for Schedule NEM2, or the date of PG&E's written approval to begin parallel operation of the REGF for purposes of participating in NEM2, whichever is later, and at each anniversary date thereafter. The eligible customer-generator shall be billed as follows:

Where the residential delivery minimum bill amount applies at the true up for a Bundled, DA/CCA, or Transitional Bundled Service customer, the customer generator will not owe any additional amounts for delivery services. The total delivery minimum bill amount will be unbundled for accounting purposes based on net energy consumed over the relevant period using non-generation rates described in the otherwise applicable rate schedule, except for NBC's which will be unbundled for accounting purposes based on total energy consumed from the grid.

Where the residential delivery minimum bill amount applies at the true up for a Bundled or Transitional Bundled Service customer, and the accumulated net generation charges over the relevant period are greater than zero, the customer-generator will also owe an amount equal to the accumulated net generation charges. Where the residential delivery minimum bill amount applies at true up for a Bundled or Transitional Bundled Service customer, and the accumulated net generation charges over the relevant period are less than or equal to zero, no credit for accumulated net generation charges will be applied to the amount owed by the customer-generator.

If the customer-generator is taking service under DA or CCA Service, separate true-ups will be calculated for the applicable PG&E charges and credits and the ESP or CCA charges and credits.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 16

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: Prior to receiving approval for Parallel Operation, the customer-generator must submit a completed PG&E application form and interconnection agreement as follows:

(L)

Rate Option	Application	Interconnection Agreement
-------------	-------------	---------------------------

NEM2S	For Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less:	
-------	---	--

<i>Application - Net Energy Metering (NEM2) Interconnection for Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less (Form 79-1151B-03)⁴</i>	<i>Agreement and Customer Authorization – Net Energy Metering (NEM2) Interconnection for Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less (Form 79-1151A-02)⁴</i>
---	--

NEM2EXP NEM2EXPM	For Solar and/or Wind Net Energy Metering (NEM2) Generating Facilities of 1,000 Kilowatts or Less, other than Facilities of 30 Kilowatts or Less:	
---------------------	---	--

<i>Generating Facility Interconnection Application, (Form 79-1174-03)</i>	<i>Interconnection Agreement for Net Energy Metering (NEM2) of Solar or Wind Electric Generating Facilities of 1,000 Kilowatts or Less, other than Facilities of 30 Kilowatts or Less (Form 79-1220)</i>
---	--

For Net Energy Metering (NEM2) non-Solar and/or Wind Generating Facilities of any size, and Solar and/or Wind Generating Facilities greater than 1,000 kW*:

(L)
(T)/(L)

<i>Generating Facility Interconnection Application, (Form 79-1174-03)</i>	<i>Interconnection Agreement For Net Energy Metering (NEM2) non-Solar and/or Wind Generating Facilities of any size, and Solar and/or Wind Generating Facilities greater than 1,000 kW (Form 79-1198-02)</i>
---	--

(L)

⁴ Both the Agreement and Customer Authorization (79-1151A-02) and Application (79-1151B-03) forms must have been submitted before PG&E will issue the Permission to Operation (PTO) letter. Information in the Application can be submitted by the Company or Customer in an electronic format, subject to approval by PG&E.

* Also see Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(L)
(T)
(T)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 17

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: (Cont'd.)

(L)

Rate Option	Application	Interconnection Agreement
-------------	-------------	---------------------------

NEMPS	For NEMPS (Special Condition 9) for projects that meet NEM Integrity requirements	
-------	---	--

<i>Generating Facility Interconnection Application, (Form 79 1174-03)</i>	79-1193-02- AGREEMENT AND CUSTOMER AUTHORIZATION Net Energy Metering (NEM2) Interconnection For Solar And/Or Wind Electric Generating Facilities Of 30 Kilowatts Or Less with Energy Storage of 10 Kilowatts Or Less or Energy Storage with Power Control System Certification
---	---

NEM2, NEM2EXP, NEM2A ,or NEM2MT > 1,000 kW	<i>Generating Facility Interconnection Application (Form 79-1174-03)</i>	<i>Rule 21 Generator Interconnection Agreement for New Energy Metering (NEM-2) Generating Facilities Greater than 1,000 Kilowatts Interconnecting Under the Fast Track Process (Form 79-1198-02)</i>
--	--	--

*Rule 21 Generator Interconnection Agreement (GIA) for Net Energy Metering (NEM2) Generating Facilities Greater than 1,000 Kilowatts Interconnecting Under the Independent Study, Distribution Study, or Transmission Cluster Process (Form 79-1198-02)**

(L)
(T)/(L)

NEM2MT	For customer-generators ≤ 1 MW taking service as a Multiple Tariff Facility under Special Condition 4 of this tariff:	(L)
--------	---	-----

<i>Generating Facility Interconnection Application (Form 79-1174-03)</i>	<i>Generating Facility Interconnection Agreement (NEM2MT - Multiple Tariff) (Form 79-1069-02)</i>
--	---

NEM2A	NEM2 Load Aggregation ≤ 1 MW
-------	------------------------------

Along with the applicable interconnection form above, also submit:

NEM2 Load Aggregation Appendix (Form 79-1202)

NEM2CDCR	See Special Condition 7	(L)
----------	-------------------------	-----

* Also see Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(T)
(T)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 18

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: (Cont'd.)

(L)

For Customers to receive service on this NEM2 schedule, their interconnection application must be submitted on or before April 14, 2023 (NEM2 Sunset Date), and must comply with the following:

- (i) The interconnection application date is defined as the submission date of an application that is free of major deficiencies and includes a complete application, a single-line diagram (for systems smaller than or equal to 30 kW, applicant does not need to upload a site-specific single-line diagram, but can instead select a template single-line diagram in the portal if applicable), a complete California Contractors State License Board Solar Energy System Disclosure Document (if applicable), a signed California Solar Consumer Protection Guide (if applicable) and for standard NEM, a signed Agreement and Customer Authorization.
- (ii) All customers seeking to interconnect on this NEM2 schedule shall submit final building permit sign off and electrical clearing by the authority having jurisdiction by no later than three years from the NEM2 sunset date (before April 15, 2026).
- (iii) For Customers seeking to interconnect on this NEM2 schedule pursuant to Special Condition 6, Load Aggregation, land review does not need to be complete for the application to be determined to be free of major deficiencies. PG&E will review the interconnection application for major deficiencies prior to commencing land review.

PG&E is granted the discretion to give NEM2 tariff eligibility to a customer if a delay in meeting the NEM2 Sunset Date (April 14, 2023) is caused by the utility. Similarly, PG&E has the discretion to apply NEM2 eligibility to customers who fail to submit the final building permit sign off and other necessary documentation within three years from the NEM2 sunset date (before April 15, 2026) if such failure is due to utility-caused delays.

For Load Aggregation, a completed and signed "NEM Load Aggregation Appendix" (Form 79-1202) must be submitted together with the appropriate NEM interconnection agreement listed above.

The eligible customer-generator must meet all applicable safety, and performance standards established by the National Electrical Code, the Institute of Electrical and Electronics Engineers, and accredited testing laboratories such as Underwriters Laboratories and, where applicable, rules of the California Public Utilities Commission regarding safety and reliability.

In order to promote the safety and reliability of the customer REGF, the applicant is required to verify as a part of each interconnection request for this tariff, that all major solar system components are on the verified equipment list maintained by the California Energy Commission and other equipment, as determined by PG&E, should be verified by the customer as having safety certification from a nationally recognized testing laboratory.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 20

SPECIAL
CONDITIONS:
(Cont'd.)

4. MULTIPLE TARIFF FACILITIES:

(L)

Multiple Tariff Facilities have the following additional provisions:

- a. When Net Generation Output Metering (NGOM) is required, such NGOM must conform to the requirements set forth in Electric Rule 21, Section J.
- b. A NEM2-eligible Constituent Generator Group is defined as a constituent generator group that is eligible for service under the provisions of either schedule NEM, NEM2, NEMBIO or NEMFC or their sub-schedules.
- c. A non-NEM2-eligible Constituent Generator Group is defined as a constituent generator group that does not take service under the provisions of schedule NEM, NEM2, NEMBIO or NEMFC, but interconnects under the non-NEM2 provisions of Electric Rule 21.
- d. All metering for Multiple Tariff Facilities called for in this Special Condition must meet the requirements needed to bill under the customer-generator's OAS. All metering, equipment and Non Export relays necessary to implement the provisions in this section will be provided at the Customer-Generator's expense.
- e. Any generators eligible for tariffs NEMA, NEM2, NEMFCA or NEMBIOA (accounts with the loads from eligible accounts aggregated on the main NEM, NEM2, NEMFC or NEMBIO account pursuant as allowed under this Special Condition 4 of this NEM2 tariff) will be treated as a separate Constituent Generator Group. However at this time NEM2A may not be combined with NEMA, NEMFCA or NEMBIOA under this Special Condition.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 21

SPECIAL
CONDITIONS:
(Cont'd.)

4. MULTIPLE TARIFF FACILITIES: (Cont'd.)

(L)

f. Except for Load Aggregation Arrangements, where multiple NEM - eligible Constituent Generator Groups are present and energy (kWh) is exported to the grid at the PCC, the billing credit will be based upon the proportional contribution of the energy production (kWh) of each NEM-eligible Constituent Generator Group over the billing period as follows:

- 1) Sum all NEM-eligible Constituent Generator Groups' NGOM readings. For NEM Paired Storage, follow the provisions in Special Condition 9.
- 2) Determine the proportion of energy (kWh) attributable to each NEM-eligible Constituent Generator Group by dividing the NGOM reading of each by the sum from (1) above.
- 3) NEM-eligible Export is the lesser of either all exported energy (kWh) as measured at the PCC or the sum of the energy (kWh) per (1) above.
- 4) Take the NEM-eligible Export and assign it to each NEM-eligible Constituent Generator Group based on its respective proportion of NGOM reading.
- 5) Determine the bill credit for the customer-generator as provided under the customer-generator's OAS in combination with the net energy metering tariff billing treatment type for each NEM-eligible Constituent Generator Group.
- 6) If interval metering is chosen per Special Condition 4.g(2)(c) of this special condition, this allocation of bill credit will be done on the aggregated intervals over a billing period. If the OAS is a time-of-use (TOU) rate schedule, the allocation will be performed for each aggregated TOU period separately.
- 7) Generating Facilities including only multiple NEM2 REGFs are not Multiple Tariff Facilities and the customer-generator will be billed as provided in Special Condition 2 of this tariff.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 22

SPECIAL
CONDITIONS:
(Cont'd.)

4. MULTIPLE TARIFF FACILITIES: (Cont'd.)

(L)

g. Multiple Tariff Facility Configurations and Metering.

1) Except for Load Aggregation Arrangements, for two or more types of NEM-eligible Constituent Generator Groups, the customer-generator must select one of the following options:

a) Install NGOM on each Constituent Generator Group. In addition, metering is required at the PCC capable of separately registering the flow of energy (kWh) in two directions. Billing credit will be calculated as provided for in Special Condition 4.f. Generation Rate Component charges are the charges for energy (kWh) used based on the generation rate component of the energy charge under the customer-generator's rate schedule(s). Billing credit will be applied consistent with the appropriate net metering tariff as follows:

- i. First, apply NEMBIO credits (if any) to Generation Rate Component charges on any aggregated accounts, and then to Generation Rate Component charges on the account served by the generating facility (Host Account).
- ii. Second, apply NEMFC credits (if any) to Generation Rate Component charges on the account served by the generating facility.
- iii. Third, apply NEM2 credits (if any) as appropriate to the remainder of energy charges except for NBC charges for usage supplied by the grid on the account served by the generating facility.
- iv. Fourth, apply NEM credits (if any) as appropriate to the remainder of energy charges on the account served by the generating facility.
- v. No credits shall offset NBC charges calculated on all usage supplied from the grid.

b) If the customer-generator has Constituent Generator Group(s) eligible for Schedule NEMBIO or NEMFC, and has a Constituent Generator Group eligible for Schedule NEM2 and/or NEM consisting of one or more Renewable Electrical Generation Facilities, the customer-generator may elect to take service for such under either Schedule NEMBIO or NEMFC, as appropriate, for all of the Constituent Generator Group(s). Likewise, if the customer-generator has Constituent Generator Group(s) eligible for NEM and NEM2, the customer-generator may elect to take service for both under NEM2.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 23

SPECIAL
CONDITIONS:
(Cont'd.)

- 4. MULTIPLE TARIFF FACILITIES: (Cont'd.)
 - g. Multiple Tariff Facility Configurations and Metering.
 - 2) For all eligible combinations of NEM-Eligible Constituent Groups and non-NEM eligible Constituent Groups, the Customer-Generator must select one of the following options:
 - a) **The Non Export Relay Option:** A Customer-Generator must install a Non-Export relay on their non-NEM Constituent Generator Groups and install metering as follows: 1) If there is only one type of NEM-eligible Constituent Generator Group then metering at the PCC is all that is required and the terms of the appropriate NEM2 tariff for that group will apply; 2) If there are two or more types of NEM2-Eligible Constituent Generator Groups, then Metering at the PCC and NGOM metering of each NEM2-Eligible Constituent Generator Group is required. The requirements of Special Condition 4.f and 4.g apply.
 - b) **The Load Metering Option:** The customer-generator must install NGOM on each NEM2-Eligible Constituent Generator Group, install energy consumption metering at the load, and install metering at the PCC as follows: 1) If there is one type of NEM2-Eligible Constituent Generator Group then the terms of the appropriate NEM2 tariff for that group will apply; 2) If there are two or more types of NEM2-Eligible Constituent Generator Groups, then the terms of Special Condition 4.f and 4.g apply.
 - c) **The Interval Meter Option:** The customer-generator must install interval NGOM on each NEM2-Eligible Constituent Generator Group and install interval metering at the PCC as follows: 1) If there is one type of Constituent Generator Group then the terms of the appropriate NEM2 tariff for that group will apply; 2) If there are two or more types of NEM2-Eligible Constituent Generator Groups, then the terms of Special Condition 4.f and 4.g for interval metering apply. Energies (kWh) generated in an interval are aggregated over a billing period according to the OAS.
 - h. Multiple Tariff Facilities, served under DA or CCA Service, may only participate to the extent their ESP or CCA offers net metering for the specific constituent generator group(s). All accounts for each specific constituent generator group must be served by the same ESP.
 - i. Multiple Tariff Facilities involving multiple Load Aggregation Constituent Generator Groups, except for those allowed under Special Condition 5.g above, are not permitted at this time.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 24

SPECIAL
CONDITIONS:
(Cont'd.)

5. NET SURPLUS ELECTRICITY COMPENSATION (NSC):

(L)

Pursuant to P.U. Code Sections 2827 (h)(4)(A), this Special Condition was established to provide a NEM customer having **Net Surplus Electricity**, (defined as all electricity generated by an eligible customer measured in kilowatt-hours over a Relevant Period – as defined in Special Condition 2.h of this tariff – that exceeds the amount of electricity consumed by that eligible customer), with **Net Surplus Electricity Compensation (NSC)** for the Net Surplus Electricity, while leaving other ratepayers unaffected. A NEM2 customer who has Net Surplus Electricity will be known as a **Net Surplus Generator**.

- a. NSC Applicability – All bundled Net Surplus Generators that satisfy the conditions in the Applicability Section of this tariff and take service under this rate schedule are eligible to receive NSC at the time of their true-up. This includes Net Surplus Generators on sub-schedules NEM2S, NEM2EXP, and NEM2EXPM. A NEM2MT Net Surplus Generator is also eligible to receive NSC but only for the one or more generators at the same metered account eligible for billing treatment under Special Condition 2.a through 2.f of this NEM2 schedule, or the applicable tariff for the non-NEM2 generator.

Net Surplus Generators who receive Direct Access (DA) Service from an ESP or who receive Community Choice Aggregation Service from a CCA are not eligible to receive NSC from PG&E but may contact their ESP or CCA Provider to see if they provide NSC.

If an eligible customer-generator elects Load Aggregation as described in Special Condition 6, the Generating Account shall be permanently ineligible to receive net surplus electricity compensation, and PG&E shall retain any kilowatt-hours and zero out any credits remaining on each account in the Load Aggregation Arrangement at the end of the Relevant Period. However, if an Aggregated Account that is not a Generating Account is separated from the Arrangement, and subsequently qualifies for NEM2, it is also eligible for NSC.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 25

SPECIAL
CONDITIONS:
(Cont'd.)

5. NET SURPLUS ELECTRICITY COMPENSATION (NSC): (Cont'd.)

(L)

- b. **The NSC Rate** – The NSC Rate is defined as the simple rolling average of PG&E’s default load aggregation point (DLAP) price from 7 a.m. to 5 p.m., for a 12-month period. PG&E shall use the NSC Rate as the value of the electricity portion of its net surplus compensation rate.

PG&E will calculate the NSC Rate each month. It will be effective on the first day of that month and PG&E will use it in the NSC Calculation for any Net Surplus Generators with a Relevant Period completed in that month (True-Up Month).

The DLAP Cutoff Date will be defined as the twentieth (20th) day of the month prior to the True-Up Month.

PG&E will wait five (5) days after the DLAP Cutoff Date for the CAISO to have time to finalize the day-ahead PG&E DLAP prices. The NSC Rate will then be calculated as the simple average of the prices for all hours between 7 a.m. and 5 p.m. over a one (1) year period ending on the DLAP Cutoff Date.

- c. Pursuant to D. 11-06-016, PG&E includes a Renewable Attribute Adder (RAA) based on the California Energy Commission (CEC) implementation methodology.

Under the CEC’s Renewables Portfolio Standard (RPS) Eligibility Guidebook⁶, an ownership verification and tracking process is set forth for Renewable Energy Credits (RECs) created by Net Surplus Generators.

PG&E will pay a RAA for Net Surplus Electricity if the Net Surplus Generator completes Form 79-1155-02 - *Schedules NEM2, NEM2V, NEMV2MSH, Net Surplus Electricity (NSE) Renewable Energy Credits Compensation Form* which requires that each true-up a Net Surplus Generator confirm it or its REC aggregator has:

- 1) certified ownership of Net Surplus Electricity Renewable Energy Credits associated with their Net Surplus Electricity;
- 2) obtained certification for the Renewable Portfolio Standards (RPS) eligibility of the Electrical Generation Facility from the CEC and provide evidence of this certification to PG&E; and
- 3) transferred the ownership of the WREGIS Certificates to PG&E.

The RAA will be calculated using the most recent Western Electricity Coordinating Council (WECC) average renewable premium, based on United States Department of Energy (DOE) published data as submitted via advice letter annually in compliance with Resolution E-4475 and Decision 11-12-018.

⁶ The CEC RPS Eligibility Guidebook is available at: <https://www.energy.ca.gov/programs-and-topics/programs/renewables-portfolio-standard>

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 26

SPECIAL
CONDITIONS:
(Cont'd.)

- 5. NET SURPLUS ELECTRICITY COMPENSATION (NSC): (Cont'd.) (L)
- d. Calculation of the NSC – NSC is calculated by multiplying any Net Surplus Electricity (kWh) by the NSC Rate in (b) and (c) above.
- e. Options for receiving NSC – A NEM2 customer with NSC will automatically have their NSC applied to any amounts owed to PG&E and then may choose to:
 - 1) take no action and roll any remaining NSC amounts forward to offset subsequent PG&E charges; or
 - 2) request that PG&E issue a check if the remaining NSC amount is greater than one dollar (\$1). A customer can select this option by calling PG&E. If the customer is closing all their accounts with PG&E, PG&E will automatically send a check; or
 - 3) elect not to receive any NSC by completing and submitting Form 79-1130 (Customer Request Form not to Receive Net Surplus Compensation) to PG&E to confirm that they do not want to participate. In this case PG&E will zero out any NSC the NEM2 customer may be otherwise eligible to receive.
- f. Qualifying Facility Status – Customers must comply with the appropriate conditions below to first demonstrate to PG&E that they are Qualifying Facilities (QFs) in order to receive NSC.
 - 1) No documentation of QF status is required of any NEM2 customer-generators with a net power production capacity of one megawatt or less, consistent with Federal Energy Regulatory Commission (FERC) regulations 18 C.F.R. §292.203.
 - 2) NEM2 customer-generators with a net power production capacity greater than one megawatt shall self-certify QF status by submitting FERC Form 556 to FERC pursuant to 18 C.F. R. §292.207(a). Notice to PG&E as the utility with which the facility will interconnect and/or transact shall be provided in accordance with FERC Form 556 instructions. Filing Form No. 556 is not a requirement for interconnection under this provision.
- g. Generator Size – Nothing in this Special Condition alters the existing NEM2 system sizing requirement. Specifically, in order to be eligible for NSC, a system must be intended primarily to offset part or all of the customer’s own electrical requirements. Systems that are sized larger than the customer’s electrical requirements are not eligible for NEM2 and therefore, are not eligible for NSC either. (L)

(Continued)

Advice 7076-E
Decision

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted November 22, 2023
Effective November 22, 2023
Resolution



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 27

SPECIAL
CONDITIONS:
(Cont'd.)

6. LOAD AGGREGATION – NEM2A:

- a. Load Aggregation is available to an eligible customer-generator, that has load served by multiple meters (“Aggregated Accounts”) located on the property where the REGF (“Generating Account”) is located and on property adjacent or contiguous to the property on which the REGF is located, only if those properties are solely owned, leased, or rented by the eligible customer-generator, subject to the terms of this Special Condition and elsewhere in this tariff. All of the Aggregated Accounts, including a single Generating Account, that are billed together under this Special Condition are referred to as an Arrangement. Customer-generators are eligible to participate in Load Aggregation provided that all meters in a Load Aggregation Arrangement are located (i) on the property where the REGF is located, or (ii) are located within an unbroken chain of contiguous parcels that are all solely owned, leased or rented by the customer-generator. For purposes of Load Aggregation, parcels that are divided by a street, highway, or public thoroughfare are considered contiguous, provided they are within an unbroken chain of otherwise contiguous parcels that are all solely owned leased or rented by the customer-generator, as verified in Form 79-1202. For purposes of determining parcel contiguity under this provision, “public thoroughfare” will include a canal, railroad track or transmission right-of-way, when these features are isolated on third party owned property. When a third party owned easement is located on a NEM2A customer-generator’s property, there is no impairment to parcel contiguity. In addition, an irrevocable easement granting sole use and control to the NEM2 customer-generator for an entire parcel can be used to establish contiguity. Otherwise, a customer-generator’s easement on a third party owned parcel will not be sufficient to establish parcel contiguity for NEM2A.
- b. Customers applying for Load Aggregation on or after April 15, 2023, may interconnect under NEM2A provided such customers have two or more existing meters as of December 15, 2022, and with a reduced legacy period of nine years to align with customers interconnecting on the NBT Schedule.

(L)

(L)

(Continued)

Advice 7076-E
Decision

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted
Effective
Resolution

November 22, 2023
November 22, 2023



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 28

SPECIAL
CONDITIONS:
(Cont'd.)

6. LOAD AGGREGATION – NEM2A: (Cont'd.)

(L)

- b. Example of NEM2A – Assume there are five parcels (A, B, C, D, E, and F) that form a cluster of contiguous parcels and D and E are separated from A, B, C and F by a street, highway, or public thoroughfare. For the purposes of participating in Load Aggregation, all five parcels are considered contiguous, provided they are otherwise contiguous and all are solely owned, leased or rented by the customer-generator. Refer to Diagram 1 (for illustrative purposes only).

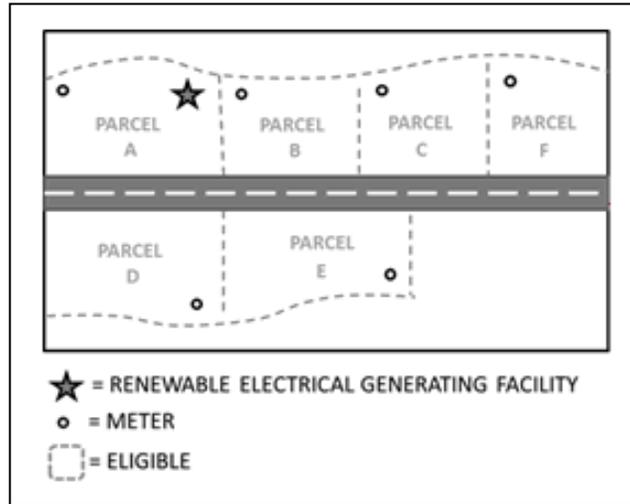


Diagram 1

Two parcels that are separated by a parcel that is only a stream or river or slough owned by a third party are considered contiguous if:

- 1A. The two parcels are otherwise eligible for NEM2A, and
- 1B. The third party is a public entity, and
- 1C. The third-party owned parcel containing the stream or river or slough is no wider than one thousand feet across as measured at the narrowest point between the two parcels, and
- 1D. Customer provides documentation that they meet these criteria if requested by PG&E.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 29

SPECIAL
CONDITIONS:
(Cont'd.)

6. LOAD AGGREGATION – NEM2A: (Cont'd.)

(L)

c. Billing Service Charges – An eligible customer-generator electing Load Aggregation shall remit service charges for the cost of providing billing services as follows. These charges shall include:

1) One-Time Setup Charge of \$25.00 per Aggregated Account and for the Generating Account, as defined in this Special Condition, and cumulatively, shall be limited to no more than \$500 per Load Aggregation Arrangement. Any change to the number of accounts included in a NEM2A arrangement is subject to this one-time fee. This Setup Charge shall be assessed without regard to the \$500 limit for accounts added after the PTO date.

Plus,

2) Monthly Charge of \$5 Per Aggregated Account and for the Generating Account as defined in this Special Condition.

7. CALIFORNIA DEPARTMENT OF CORRECTIONS AND REHABILITATION (CDCR)

“Eligible customer-generator” includes the Department of Corrections and Rehabilitation using a renewable electrical generation technology, or a combination of renewable electrical generation technologies, with a total capacity of not more than eight megawatts, that is located on the department’s owned, leased, or rented premises, and is interconnected and operates in parallel with the electrical grid, and is intended primarily to offset part or all of the facility’s own electrical requirements.

The amount of any wind generation exported to the electrical grid shall not exceed 1.35 megawatt at any time. CDCR Eligible Customer Generators are subject to Network and/or Distribution upgrade costs in accordance with Rule 21 Section D.13.e.

CDCR shall use Interconnection Application Form 79-1174-03 to apply under this Special Condition. In addition to submitting the application form, CDCR will notify PG&E at Rule21gen@pge.com of the Generating Facility’s size, and if applicable, any allocation between NEM2 and non-NEM2 generation.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 30

SPECIAL
CONDITIONS:
(Cont'd.)

8. NEM2 Legacy Provisions

(L)

- 1. As of April 15, 2023, NEM customers who have completed their 20 years on Electric Schedule NEM and must be transitioned to the NEM2 rate schedule will remain on Electric Schedule NEM until NBT is operational (for residential customers, billing must be operational 12 months after December, 15, 2022 and for non-residential customers 18 months after December, 15, 2022), at which time these customers will transition to NBT at the end of their Relevant Period and will take service on the applicable OAS rates, eligible for NBT.

This Special Condition is applicable to all Customers receiving service on this NEM2 Schedule who have submitted all documentation necessary to receive service on this schedule by no later than April 14, 2023, as detailed in Special Condition 3. This Special Condition 8 does not apply to customers who have applied to interconnect under this schedule on or after April 15, 2023. Customers interconnecting under NEM2A on or after April 15, 2023, are subject to a 9-year legacy period as specified in Special Condition 6.

- a. 20-Year Transition Period. Pursuant to D.16-01-044, Customers who are receiving service on this NEM2 Schedule, or who have submitted all documentation necessary to receive service on this NEM2 Schedule, are eligible to continue receiving service on this NEM2 Schedule for a period of 20 years from the original year in which their Generating Facility was interconnected to PG&E's grid, indicated by and measured from the date on which the Customer originally received Permission To Operate (PTO) the Generating Facility from PG&E and ending at the conclusion of the Customer's applicable Relevant Period that ends immediately on or after the 20th anniversary of the original PTO date. For example, if a Customer initially received PTO on April 1, 2018, the Customer is eligible to continue receiving service on this Schedule through the conclusion of the Relevant Period ending immediately on or after March 31, 2038.

Customers served on Schedule NEM who elect to make a one-time switch (this voluntary switch should happen before the closure of NEM2) to the NEM2 Schedule prior to the conclusion of their Schedule NEM 20-year transition period can continue service under the NEM2 Schedule from the date of their original Schedule NEM PTO date; these Customers may not restart their 20-year transition period by electing to move to this Schedule. Customers electing to switch to the NEM2 Schedule prior to the conclusion of their Schedule NEM 20-year transition period permanently forfeit any of their Generating Facility's remaining transition period eligibility on Schedule NEM and may not later change back to receiving service under Schedule NEM. Customers at the end of their 20-year NEM enrollment who transitioned to the NEM2 tariff may not restart a 20-year transition period under NEM2. These customers will remain on NEM2 and will be transitioned to the Net Billing Tariff (NBT) once it is operational.

(L)

(T)

(T)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 31

SPECIAL
CONDITIONS:
(Cont'd.)

- 8. NEM2 Legacy Provision (Cont'd.)
 - b. Modifications⁷. REGFs eligible for the 20-year transition period outlined above that are modified and/or repaired shall remain eligible for the remainder of their 20-year transition period as long as the modifications and/or repairs do not increase the REGF by more than the greater of:
 - 1) 10 percent of the REGF's nameplate rating capacity, as established when the REGF was originally interconnected, or
 - 2) 1 kW;

and provided the modifications and/or repairs do not result in the REGF exceeding the Customer's annual onsite load.

Pursuant to D.22-12-056, the addition of energy storage to the Customer's existing Generating Facility shall not disqualify Customer from the remainder of their 20-year Transition Period on this Schedule.
 - c. Transferability. REGF eligible for the 20-year transition period shall not lose their eligibility if transferred to a new owner, operator, or PG&E account, provided the REGF remains at its original location.⁸

(L)

⁷ This provision will only be enforced after April 14, 2023. Customers making modifications and/or additions to their REGF that exceed the 10 percent, or 1 kW limit referenced above have the option of either metering the additions and/or modifications separately under another eligible tariff (i.e., Rule 21 non-export), or have the entire REGF served under the Net Billing Tariff (NBT) subject to the terms and conditions contained therein. If an existing NEM2 customer chooses to meter the addition under Rule 21 non-export, the Customer's 20-year transition period is not altered. If an existing NEM2 customer chooses to have the entire system served on the NBT and the REGF receives Permission To Operate (PTO) for service on NBT before January 1, 2028, then the customer will be eligible for the same 9-year legacy period under the NBT as a new NBT customer and, if applicable, they will also receive the 9-year export compensation rate lock-in period and ACC Plus based on the calendar year that they receive PTO of the upgraded system on NBT.

⁸ The transfer of an existing REGF to a new location is considered a new installation requiring a new Interconnection Agreement that is subject to the applicable tariffs in place at the time the new Interconnection Request is completed.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 32

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

(L)

a. Definitions:

NEM Paired Storage:

NEM Paired Storage is defined as qualifying energy storage devices ("storage system") paired with a REGF that either:

(i) meets the Renewables Portfolio Standard (RPS) Guidebook⁹ requirements as an "addition or enhancement" as described in Section c. below, or

(ii) is eligible to received certain benefits as is described this Special Condition by virtue of the fact that it is paired with a REGF although it is not exclusively renewable charged, pursuant to California Public Utilities Commission (CPUC) Decision (D.) 14-05-033 and D.19-01-030.

NEM Paired Storage is considered "Small NEM Paired Storage" when the storage device is ≤10kW and "Large NEM Paired Storage" when the storage device >10kW.

AC-Coupled:

The REGF has its own inverter or set of inverters; and separately, the storage system has its own inverter or set of inverters, pursuant to CPUC D.19-01-030.

In AC-coupled NEM-eligible GFs paired with storage devices, storage device capacity is determined as the (AC) maximum discharge capacity. The size of the storage system in AC-coupled REGF plus storage systems is the inverter's (or inverters') nameplate capacity (nameplate capacities summed).

DC-Coupled:

The REGF and the storage share the same inverter, or set of inverters, pursuant to CPUC D.19-01-030.

The size of the storage system is the lesser of the shared inverter's (or inverters') nameplate capacity (capacities summed) and the storage device's (devices') maximum continuous discharge capacity (capacities summed) listed on the device's (devices') technical specifications sheets. A storage device's maximum continuous discharge capacity may be listed on technical specification sheets using different terminology; PG&E will use common sense to determine whether a device's technical specification sheet includes the appropriate metric for purposes of determining system size, regardless of the terminology used. If that metric is not included, PG&E will rely on the inverter's nameplate rating.

⁹ The RPS Guidebooks can be found at: <https://www.energy.ca.gov/programs-and-topics/programs/renewables-portfolio-standard>

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 33

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

(L)

a. Definitions: (Cont'd.)

NEM Integrity

The requirement that a customer only receives credits for renewably generated exports from NEM-eligible REGF.

Certified Power Control System (Certified PCS)

A storage system that has received UL1741 CRD* or utility approved later certification for Power Control systems (PCS) that will comply with either No Grid Charging or No Storage Export as defined below. These systems do not require a NGOM as the PCS is certified to preserve NEM Integrity, as defined above.

No Grid Charging:

A storage system that uses a Certified PCS, as defined above, to ensure that the storage system cannot be charged from the PG&E grid⁹. A PG&E approved physical non-import relay or a functionally equivalent non-import configuration to prevent grid power from flowing to the storage device is also permitted. Inadvertent but minor instances of grid import are permitted. Such inadvertent grid imports must not exceed durations of ten seconds.

No Storage Export:

A storage system that uses a Certified PCS, as defined above, to ensure that the storage system cannot export to PG&E's grid and therefore will not result in additional credits. A PG&E approved physical non-export relay or a functionally equivalent non-export configuration to prevent storage device export is also permitted. Inadvertent but minor instances of storage export are permitted. Such inadvertent grid exports must not exceed durations of ten seconds.

* CRD refers to an Underwriters Laboratories (UL) Certification Requirement Decision, in this case the one issued on 3/8/2019.
⁹ In the event of an expected PSPS (Public Safety Power Shutoff) outage, as evidenced by a 48-hour notice from PG&E to the expected outage start, a storage system defined as "No Grid Charging" and designed for resiliency, meaning it is capable of providing back-up power safely and in compliance with all relevant tariffs, electric rules, other requirements, and is qualified by PG&E to participate, will be temporarily permitted to charge from the grid in order to prepare for the PSPS outage. The notification must specify an impact to the customer generator location. This temporary permission will begin at the publication of the 48-hour notification and will end 24 hours after the end of the PSPS event, as marked by the restoration of power at the site. If power is not shutoff, the temporary permission will end 72 hours after the original 48-hour notice. At the end of the temporary permission period as described above, the storage system will need to revert to "No Grid Charging" operation mode in order to maintain compliance with the NEM tariff, notwithstanding additional PSPS Alerts. At no point during the temporary permission period will the system be permitted to violate the interconnection agreement. Specifically, the storage system must not increase the host facility's historical peak demand.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 34

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

b. Interconnection

NEM Paired Storage will have the same interconnection cost responsibility as the NEM generator that it is paired with, including charges or fees related to the interconnection application, Rule 21* engineering study/review, and/or any associated distribution upgrades.

See Section c.5. below for additional information

c. Types of NEM Paired Storage

The Renewables Portfolio Standard (RPS) Guidebook⁸ establishes two categories of energy storage that may be considered an addition or enhancement to a renewable electrical generation facility: "integrated" and "directly connected" storage.

(L)

(L)

(T)/(L)

(L)

(L)

(L)

(L)

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(T)

|

(T)

(Continued)



ELECTRIC SCHEDULE NEM2 NET ENERGY METERING SERVICE

SPECIAL CONDITIONS: (Cont'd.)

- 9. NEM Paired Storage
c. Types of NEM Paired Storage
1) Integrated Storage:

Integrated Energy Storage is defined in the RPS guidelines as methods of storing energy from a renewable energy resource that are integrated into the REGF as part of the generation process. Note that, for battery-based storage, the storage device must only be capable of storing energy from the REGF to be considered Integrated Storage.

Table with 4 columns: SCENARIO, Billed As, Interconnection Agreements, Interconnection Costs (Section 9.c.). Rows describe AC and DC Coupled NEM Paired Storage scenarios.

- 2) Directly Connected:

Directly Connected NEM Paired Storage is defined in the RPS guidelines as meeting the following requirements:

(i) The storage device is directly connected to the REGF via an internal power line (i.e., power may not be transmitted from the renewable facility to the energy storage via an external distribution line) and

(ii) The storage device must be operated as part of the NEM eligible facility.

Note that the storage device is not required to be exclusively charged by the REGF.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)

(L) (L) (T)/(L) (L) (L) (T)/(L) (L) (L) (T) (T)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 36

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

(L)

c. Types of NEM Paired Storage

2) Directly Connected: (Cont'd.)

Directly Connected Cases:

(i) Small (≤ 10 kW) DC-Coupled NEM Paired Storage system:

Small DC-Coupled storage systems are not required to meet either the "No Grid Charging" or "No Storage Export" requirements, Customers must apply with 79-1174-03, and either complete interconnection agreement Form 79-1193-02 (solar and/or wind electric facilities of 30 kW or less) or Form 79-1069-02 (all other REGF with a storage system configurations fulfilling the requirements of "No Grid Charging"). All configurations will be billed using the estimation methodology as described in Section 3.(ii) of this special condition unless; additional metering is installed as described in "Large NEM Paired Storage" below, or the system is operating with a Certified PCS.

(ii) Large (> 10 kW) DC-Coupled NEM Paired Storage system:

Large DC-Coupled storage systems must satisfy the definition of "No Storage Export." Customers must apply with 79-1174-03, complete Form 79-1069-02. Customers will be billed as described for Large NEM Paired Storage in Section 3.(iii) of this special condition, unless using a Certified PCS, in which case they will be billed as described in Section 3.(i).

For this case, there are no restrictions on the maximum storage system size (kW).

(iii) Large (> 10 kW) AC-Coupled NEM Paired Storage system:

Large AC-Coupled NEM Paired Storage systems shall have a maximum output power no larger than 150% of the NEM-eligible generator's maximum output capacity. Pursuant to Decision 20-06-017 the maximum output capacity limit shall not apply for a period of 3 years starting on August 16, 2020.

Large NEM-eligible GFs are required to select one of the following:

- a) install a non-export relay on the storage device(s);
- b) install an interval meter for the NEM-eligible generation, meter the load, and meter total energy flows at the point of common coupling;
- c) install an interval meter directly to the NEM-eligible generator(s); or
- d) or operate using a Certified PCS.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 37

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

c. Types of NEM Paired Storage

2) Directly Connected: (Cont'd.)

(iii) Large (>10kW) AC-Coupled NEM Paired Storage system (Cont'd.):

Large NEM Paired Storage Systems must apply with 79-1174-03, either complete interconnection agreement Form 79-1193-02 (solar and/or wind electric facilities of 30 kW or less) or Form 79-1069-02 (all other REGF with a storage system configurations). Customers will be billed as described in Section 3.)(iii) of this special condition unless operating using a Certified PCS, in which case, they will be billed as described in Section 3.)(i).

(iv) Small (≤10kW) AC-Coupled storage systems:

Small AC-Coupled NEM storage device is not required to be sized to the customer's demand or the NEM generator. Small NEM Paired Storage have the option to install metering as required for Large NEM Paired Storage, or use a "Certified Power Control System (PCS)", as defined above, to be billed as described in Section 3.)(i) of this special condition. Otherwise, it will be billed using the estimation methodology describe in Section 3.)(ii) of this special condition.

Small NEM Paired Storage systems eligible must apply with the 79-1174-03 (NEM2) and complete the 79-1193-02 (NEM2) when the NEM-Eligible GF is sized 30 kW or less or apply with the 79-1174-03 (NEM2) and complete the 79-1069-02 (NEM2) when the NEM-eligible GF exceeds 30 kW.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 39

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

c. Types of NEM Paired Storage

3) Billing for NEM Paired Storage

(i) Large or Small NEM Paired Storage with Certified PCS

Large or Small NEM Paired Storage operating with a Certified PCS to ensure NEM Integrity, as defined above, can be billed as if storage and REGF were all one generator (e.g. NEMS, NEMEXP).

(ii) Estimation Methodology For Small NEM Paired Storage (≤10kW)

Small NEM Paired Storage without metering installed (as required for Large NEM Paired Storage) and not using a Certified PCS will be billed using an estimation methodology, which caps maximum allowable NEM bill credits based on a monthly output profile.

a. California Solar Initiative Expected Performance-Based Buydown (CSI EPBB) calculator, PG&E will establish a maximum cap for NEM-eligible exports for each monthly billing period based on the EPBB production estimate for the customer's NEM-eligible generator.

The monthly output estimation should align with a customer's billing period (e.g., if the customer's billing date is January 15, the maximum allowed NEM export should be based on a January output estimation.)

b. Any export exceeding this limit would not be eligible for NEM credit and would be forfeited. Peak period exports would be reduced first, followed by partial peak and then off peak as necessary.

For example, if there was an export to the grid of 150 kWh and the EPBB-based limit for the month was set at 100 kWh, then the excess 50 kWh would be deducted from the actual exports recorded, beginning with exports that occurred during peak periods.

(L)

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 40

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

(L)

c. Types of NEM Paired Storage

3) Billing for NEM Paired Storage (Cont'd)

(ii) Estimation Methodology For Small NEM Paired Storage (≤10kW) (Cont'd)

c. In the event the Small NEM-eligible GF is combined with other generation facilities pursuant to Special Condition 4, the billing provision of Special Condition 4 will apply, not this billing estimation methodology.

Should a customer decide to opt-out of using this estimation methodology, the customer must install one of the metering requirements described in the Large NEM Paired Storage section, or a Certified PCS, as described above. The customer may only switch at the start of a new NEM Relevant Period.

(iii) Large NEM Paired Storage systems without a Certified PCS are billed consistent with Special Condition 4 with the storage treated as a non-NEM eligible generator.

4) NEM Paired Storage Output Metering Costs

PG&E will install standard metering equipment whenever possible while interconnecting NEM Paired Storage systems. Standard metering equipment for this purpose comprises a single meter which is a self-contained, single phase, SmartMeter. The fee for installation of standard metering equipment is no more than \$600.00.

However, this fee cap does not apply to NEM Paired Storage requiring complex metering solutions. Complex metering solutions include any configuration other than the standard equipment described above. The cost for complex metering varies and is based on actual costs which will be described in the customer's invoice.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 41

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage (Cont'd.)

(L)

c. Types of NEM Paired Storage

5) NEM Paired Storage Interconnection Cost Responsibility

For the purpose of determining if a NEM Paired Storage REGF exceeds 1 MW criterion, refer to the sizing definition included in the AC-Coupled and DC-Coupled definition at the beginning of this Special Condition.

- (i) NEM Paired Storage REGF < 1 MW - The storage will have the same interconnection cost responsibility as the NEM-eligible GF that it is paired with for a REGF less than or equal to 1 MW.
- (ii) NEM Paired Storage REGF > 1 MW - The storage will have the same interconnection cost responsibility as the NEM generator that it is paired with for a REGF greater than 1 MW
- (iii) In the event the storage is added at a later date after the permission to operate of the NEM-eligible GF it is subsequently paired with, the storage applicant will be required to pay the same interconnection fees and costs that the NEM-eligible GF would be required to pay, as provided in Electric Rule 21*.

(L)
(T)/(L)

d. Storage Size Dependent Requirements

(L)

Requirements differ depending on the size of the NEM Paired Storage and whether it is paired with a solar generator or not. The storage device size is determined by the inverter alternating current nameplate rating.

(L)

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(T)
(T)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 42

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage (Cont'd.)

(L)

- e. Requirements for Large NEM Paired Storage (i.e., All NEM Paired Storage Devices except Solar NEM paired with Storage Sized 10 kW and Smaller)

For NEM-paired storage systems with storage devices larger than 10 kW, the NEM Paired Storage shall have a maximum output power no larger than 150% of the NEM-eligible generator's maximum output capacity. Pursuant to Decision 20-06-017 the maximum output capacity limit shall not apply for a period of 3 years starting on August 16, 2020.

Large NEM Paired Storage systems are required to either:

- 1) install a non-export relay on the storage device(s);
- 2) install an interval meter for the NEM-eligible generation, meter the load, and meter total energy flows at the point of common coupling;
- 3) install an interval meter directly to the NEM-eligible generator(s);
or
- 4) Operate using a Certified PCS.

- f. Requirements for Small NEM Paired Storage (i.e., Solar NEM Paired with Storage Devices Sized 10 KW or Smaller)

Small NEM Paired Storage is not required to be sized to the customer demand or the NEM generator. Customers with Small NEM Paired Storage have the option to install metering as required for Large NEM Paired Storage or use a Certified PCS to ensure NEM Integrity, otherwise they will be billed using the estimation methodology described in Section 3.)(ii) of this special condition.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 43

SPECIAL
CONDITIONS:
(Cont'd.)

10. Natural or Human-Made Disasters

(L)

Pursuant to Special Condition 8, all Customers receiving service on Schedule NEM2 who impacted by a natural or human-made disaster may request service on this tariff from (i) the date of the issuance of their original pre-natural-or- human-made disaster "permission to operate" (PTO) letter until (ii) the date of the customer's first Energy True Up in the twenty first (21st) year.

Impacted Customers must:

- (i) reapply for interconnection with a replacement system sized to generate no more than the 12 months of historic, or estimated, usage (kWh), and
- (ii) when reapplying for interconnection, submit proof of destruction of the renewable generator, if requested by PG&E.

If the generator needs to be replaced due to a natural or human-made disaster PG&E will true-up the NEM account(s) pursuant to Special Condition 2.h., and Net Surplus Compensation will be issued, if any, pursuant to Special Condition 5, up to the date of the natural or human-made disaster, unless the Customer requests that PG&E continue to bill the Customer on NEM2 through the Customer's the next regular true-up date.

(L)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 44

SPECIAL
CONDITIONS:
(Cont'd.)

10. Natural or Human-Made Disasters (Cont'd)

(L)

The intervening period from destruction of the generator to PTO of the replacement generator must be no longer than two years, unless reasonable documentation acceptable to PG&E is provided showing that the new interconnection is in process. The interconnection application must be completed by the same NEM2 customer who was taking service on NEM2 prior to the Natural or Human-Made Disaster. If the generator is not replaced by the same NEM2 Customer, but the property is sold to a new owner after the destruction of the generator, this provision does not extend to the new owner. The new owner must apply and take service under the NEM tariff in effect at the time and is subject to all the requirements of a new customer seeking interconnection for that NEM tariff.

Customers impacted by Natural or Human-Made Disasters who meet the requirements included in this Special Condition and whose replacement system is sized¹² no greater than 1 megawatt (MW) are exempt from the interconnection application fee when reapplying.

Customers impacted by Natural or Human-Made Disasters must comply with all requirements associated with the installation of Smart Inverter technology, as defined in Electric Rule 21.

(L)

(Continued)



ELECTRIC TABLE OF CONTENTS

Sheet 1

TABLE OF CONTENTS

SCHEDULE	TITLE OF SHEET	CAL P.U.C. SHEET NO.	
Title Page.....		56768-E	(T)
Rate Schedules.....	56596,56597,56598,56599, 56769 , 56646,52769,49654,52770-E		(T)
Preliminary Statements.....	52771,48064,52561,41723,49327,54450,56606-E		
Preliminary Statements, Rules.....		56607-E	
Rules		55898,48369-E	
Maps, Contracts and Deviations.....		37960-E	
Sample Forms.....	47207,49743,49301,56342, 49303,49304,		
.....	51241,51242,54733,52810,49309,56114,49311-E		

(Continued)

Advice 7076-E
Decision

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted
Effective
Resolution

November 22, 2023
November 22, 2023



ELECTRIC TABLE OF CONTENTS

Sheet 6

Table with columns: SCHEDULE, TITLE OF SHEET, and CAL P.U.C. SHEET NO. Includes sub-sections for Rate Schedules and Other. Lists various services like BEV, S, SB, E-BioMAT, etc. with their corresponding sheet numbers.

(Continued)

Attachment 2

Redline Tariff Revisions

For convenience of the reader, PG&E has included redline revisions in Attachment 2. Where NEM2 has been revised, the affected sheets are included in Attachment 1. These redline revisions only include sheets with language changes and does not include sheets that merely have location changes.



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 1

APPLICABILITY: Pursuant to Decision (D.) 22-12-056, this Schedule is closed to new customers with applications submitted after April 14, 2023 unless the customer is applying for Load Aggregation (NEM2A), as detailed in Special Condition 6. Notwithstanding the foregoing, and except for Load Aggregation customers, customers applying on or after April 15, 2023, but before the Net Billing Tariff (NBT) adopted by that decision is approved, may apply for interconnection under this Schedule subject to the terms of Special Condition 11. Customers applying before April 15, 2023, are subject to the application requirements specified in Special Condition 3 (Interconnection) to maintain eligibility on NEM2.

This net energy-metering schedule pursuant to Decision (D.) 16-01-044 is applicable to a customer who takes service on an applicable time-of-use (TOU) rate schedule^{1,2} and who uses a Renewable Electrical Generation Facility (REGF) as defined below that is located on the customer's owned, leased, or rented premises, is interconnected and operates in parallel with PG&E's transmission and distribution systems, and is intended primarily to offset part or all of the customer's own electrical requirements (hereinafter "eligible customer-generator" or "customer"). For a NEM REGF paired with storage, see Special Condition 9.

A REGF greater than one megawatt seeking interconnection with PG&E's transmission system under this Rate Schedule that is not subject to one of the exceptions described in Electric Tariff Rule 21 Section B.1 (Applicability) shall interconnect in accordance with the instructions provided there. Such customers shall also apply via PG&E's online application portal (YourProject) for the purpose of initiating an application and determining eligibility of their REGF under this Schedule. This requirement is not applicable to such REGFs with Permission to Operate letters received as of May 6, 2022, or proposed REGFs with materially complete interconnection applications submitted as of May 6, 2022.

Notwithstanding the definition of "eligible customer-generator" above, eligible customer generator also includes (i) the California Department of Corrections and Rehabilitation (CDCR) pursuant to Special Condition 7 of this tariff.

Subject to the requirements of Special Condition 6, Load Aggregation to determine the customer's own electrical requirements is permitted. Certain incremental billing and metering costs set forth in this schedule that are related to net energy metering are applicable to Electric Service Providers (ESPs) serving eligible customer-generators.

¹ Customers on Schedules such as ET, ES, and ESR, which have no corresponding TOU Rate, are not required to switch to TOU rates, unless and until such a rate becomes available.
² Customers, including those on Load Accounts on NEMA as described in Special Condition 6, switching from Schedule NEM to this NEM2 ~~successor~~ tariff are required to take any applicable TOU rate, beginning at the time the customer switches to the NEM2 ~~successor~~ tariff, pursuant to D.14-03-041 and D. 16-01-044.

(Continued)

Advice	6778-E	Issued by	Submitted	December 5, 2022
Decision	D.22-08-024	Meredith Allen	Effective	June 29, 2023
		Vice President, Regulatory Affairs	Resolution	



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 3

APPLICABILITY: (Cont'd.) Due to the complexity of Load Aggregation Arrangements and/or Multiple Tariff Facilities NEM2 generating facilities interconnecting under the provisions of Special Conditions 4 and 6 may require additional review and/or interconnection facilities and other equipment, and may incur interconnection costs, as provided for in electric Rule 21*.

All Customers with Renewable Electrical Generation Facilities larger than 1 MW are subject to interconnection, Network and/or Distribution upgrade costs in accordance with Rule 21*.

Change of Party for 30 kW or less or customer transitioning to Schedule NEM2 from NEM:

- (i) A Customer who owns, rents or leases a premises that includes solar and/or wind turbine electrical generating facilities, or a hybrid of both with a capacity of 30 kW or less, that was approved by PG&E for NEM2 interconnection prior to the Customer moving in and/or taking electric service with PG&E (Change of party Customer); or
- (ii) A Customer that was previously approved by PG&E for NEM interconnection but is transitioning to the NEM2 Rate Schedule as described in the NEM tariff (NEM Transition Eligible Customer); or
- (iii) A Customer that was previously approved by PG&E for NEM interconnection but who has voluntarily enrolled on Schedule NEM2 from NEM (NEM Voluntary Transition Customer)

will take service on this tariff (or other appropriate tariffs as determined by the Commission) as long as the requirements of the section ~~above~~ below (regarding tariff compliance and release of information) are met. Any type of REGF other than either a solar and/or wind turbine electrical generating facilities, or a hybrid of both with a capacity of 30 kW or less, may at PG&E's request be required to complete and submit to PG&E a new NEM2MT Interconnection Agreement as indicated in Special Condition 3 and/or Affidavit (Appendix C).

The Change of party Customer, NEM Transition Eligible Customer or NEM Voluntary Transition Customer will not be required to upgrade their generating facility if they have met all interconnection standards and received permission to operate for the generator currently in place.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 3

APPLICABILITY: All Customers must:
(Cont'd.)

- 1) Ensure that the generating facility is compliant with all applicable tariffs safety and performance standards as delineated in PG&E's Electric Rule 21 and other applicable tariffs*;
- 2) ~~understand~~ Accept that PG&E may from time to time release to the California Energy Commission, ~~and/or~~ the California Public Utilities Commission, ~~and/or other state Agencies~~ information regarding the Customer's, NEM Transition Eligible Customer's or NEM Voluntary Transition Customer's facility, including such Customer's name and REGF location, capacity and operational characteristics. Furthermore, as a condition of receiving service under this tariff, pursuant to CPUC Decisions 14-11-001 and 21-06-026, PG&E is required to provide certain data, including, but not limited to, confidential customer information, to the CPUC, its contractors, the California Department of Consumer Affairs Contractors State License Board, and the California Department of Financial Protection & Innovation. Customer authorizes PG&E to release any and all information provided in the Net Energy Metering Application for interconnection to the entities identified above without further notification or consent.

Change of party Customers-, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers with solar and/or wind turbine electrical generating facilities up to 30 kW making any modification to the generating facility are not eligible for this provision. These generators and solar and/or wind electric generating facilities over 30 kW and all other REGF are not eligible for this provision and must complete the interconnection process in Special Condition 3 of this tariff.

Change of party Customers, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers making any Material Modification (pursuant to Rule 21) to previously approved PG&E NEM solar and/or wind turbine electrical generating facilities or other Renewable Electrical Generation Facility are not eligible for this provision and must, where required by Rule 21, complete the interconnection process in Special Condition 3 of this tariff.

Change of party Customers, NEM Transition Eligible Customers, or NEM Voluntary Transition Customers also must agree to comply with all rules and requirements of this and other applicable tariffs.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 6

SUB-SCHEDULES: Eligible customer-generators will be placed on the appropriate sub-schedule as described below:

1. NEM2S – For Small Customer (as defined in Rule 1) customer-generators taking service with solar and/or wind generating facilities of 30 kilowatts or less.
2. NEM2EXP – For Small Customer (as defined in Rule 1) customer-generators with (i) solar and/or wind generating facilities of 1,000 kilowatts or less, other than facilities of 30 kilowatts or less, or (ii) any other REGF of 1,000 kilowatts or less.
3. NEM2EXPM – For all other commercial, industrial customer-generators, and agricultural customers billed monthly under Special Condition 2.
4. NEM2MT – For customer-generators taking service as a Multiple Tariff Facility under Special Condition 4 of this tariff.
5. NEM2A – For a customer-generator with a Load Aggregation Arrangement pursuant to Special Condition 6 of this tariff.
6. NEM2CDCR – For a CDCR customer-generator pursuant to Special Condition 7.

SPECIAL CONDITIONS:

1. METERING*: Customers going on this tariff must have metering and data communication capabilities necessary to render accurate bills under NEM2. Multiple Tariff Facilities will be metered under one of the options described in Special Condition 4. All other net energy metering shall be accomplished using a single meter capable of separately registering the flow of electricity in two directions (imports and exports), and capable of metering intervals required for billing under NEM2. Data communication capabilities must meet PG&E's requirements for transferring usage data to PG&E for billing.

If the eligible customer-generator's existing electrical meter does not meet the requirements described in paragraph 1 above of Special Condition 1, is not capable of separately measuring the flow of electricity in two directions, the eligible customer-generator shall be responsible for all expenses involved in purchasing and installing an acceptable meter with that is able to separately measure electricity flow in two directions (imports and exports) data communication capabilities required to enable accurate billing under NEM2.

*There may be additional metering requirements under Rule 21 Section B.1 Applicability regarding net energy metering NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 6

SPECIAL
CONDITIONS:
(Cont'd.)

1. METERING: (Cont'd.)

If none of the ~~normal~~ metering and data communication options available to at PG&E's disposal which that are necessary to render accurate billing under NEM2 requirements are acceptable to the customer-generator, PG&E shall have the right to refuse interconnection for new customers. For NEM Transition Eligible Customers, if none of the metering options available to PG&E that are necessary to render accurate billing under NEM2 requirements are acceptable to the customer-generator, PG&E shall reserve the right to transition such customers to a Rule 21 Uncompensated Export arrangement instead of NEM2. Under a Rule 21 Uncompensated Export arrangement, the customer may incur departing load and standby charges, if applicable. Customers who will be transitioned to Rule 21 Uncompensated Export may require updated meter programming to allow for accurate billing under Rule 21. Per Electric Rule No. 16 Section A.12, customers are required to provide PG&E access to metering equipment for such purposes. If a customer refuses to grant access to PG&E, such customer's permission to operate (PTO) under NEM will terminate and such customer will need to disconnect their generating facility from the grid. PG&E reserves the right to disconnect the customer's service if customer does not comply with PG&E rules within a reasonable period of time.

If PG&E is unable to provide metering required for NEM2 billing for either new or NEM Transition Eligible customers, As an alternative, PG&E shall have the option, but not an obligation, to provide an estimation methodology for such customers.

Customer-generators with Load Aggregation Arrangements will need metering on the Generating Account capable of separately measuring imports and exports in a manner commensurate with the smallest time interval used by PG&E to establish billing determinates for any of the Aggregated Account meters. If a newly installed REGF can use the existing metering, the metering charges will be based on applicable meter charges in the Generating Account TOU OAS; if a new meter is requested by the customer for a new service as allowed in Special Condition 3, it must be installed at the customer's expense as a Special Facility using incremental costs, pursuant to Section I, Electric Rule 2.

(Continued)

Advice 6682-E-A
Decision D.22-07-001

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted
Effective
Resolution

September 19, 2022
February 28, 2023



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 7

SPECIAL
CONDITIONS:
(Cont'd.)

1. METERING: (Cont'd.)

For each Aggregated Account other than the Generating Account, an appropriate load account meter is required, consistent with the TOU rate schedule and NEM2 billing requirements for that account, ~~and~~ The customer is responsible for all metering charges provided associated with ~~for in~~ each Aggregated Account's OAS.

Additional metering requirements for NEM Paired Storage are described in Special Condition 9.

2. BILLING: Facilities qualifying under Multiple Tariffs Facilities, see Special Condition 4.

For customer-generators taking service on OAS's, any net monthly consumption or production shall be valued as follows:

a. For an OAS with Baseline Rates

Any net consumption or production shall be valued monthly as follows:

If the eligible customer-generator is a net consumer, the eligible customer-generator will be billed in accordance with the eligible customer-generator's OAS except for the non-bypassable charge (NBC) calculation addressed in 2.c. For NEM Paired Storage, net generation will be calculated as described in Special Condition 9, Section g. as applicable.

If the eligible customer-generator is a net generator, the net kWh generated shall be valued at the rate for the kWh up to the baseline quantity, with any excess kWh generated, valued at the rate for the appropriate tier level in which the equivalent kWh of usage would fall. These credits, if any, do not reduce the charges from the NBC calculation addressed in 2.c.

If the eligible customer-generator is being served under DA or CCA Service, ESP or CCA charges will be specified by their ESP or CCA in accordance with the eligible customer-generator's OAS and PG&E's Direct Access or Community Choice Aggregation tariffs. Applicable PG&E charges or credits will be valued as described in this Special Condition 2.

For a DA or CCA Service customer-generator, Generation Rate Component credits, if any, do not reduce the charges owed to PG&E for energy supplied to the eligible customer-generator, nor do they reduce the NBC calculation in 2.g.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 13

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: Prior to receiving approval for Parallel Operation, the customer-generator must submit a completed PG&E application form and interconnection agreement as follows:

Rate Option	Application	Interconnection Agreement
NEM2S	For Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less: <i>Application - Net Energy Metering (NEM2) Interconnection for Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less (Form 79-1151B-03)⁴</i>	<i>Agreement and Customer Authorization – Net Energy Metering (NEM2) Interconnection for Solar and/or Wind Electric Generating Facilities of 30 Kilowatts or Less (Form 79-1151A-02)⁴</i>
NEM2EXP NEM2EXPM	For Solar and/or Wind Net Energy Metering (NEM2) Generating Facilities of 1,000 Kilowatts or Less, other than Facilities of 30 Kilowatts or Less: <i>Generating Facility Interconnection Application, (Form 79-1174-03)</i>	<i>Interconnection Agreement for Net Energy Metering (NEM2) of Solar or Wind Electric Generating Facilities of 1,000 Kilowatts or Less, other than Facilities of 30 Kilowatts or Less (Form 79-1220)</i>
	For Net Energy Metering (NEM2) non-Solar and/or Wind Generating Facilities of any size, and Solar and/or Wind Generating Facilities greater than 1,000 kW* ₋ : <i>Generating Facility Interconnection Application, (Form 79-1174-03)</i>	<i>Interconnection Agreement For Net Energy Metering (NEM2) non-Solar and/or Wind Generating Facilities of any size, and Solar and/or Wind Generating Facilities greater than 1,000 kW (Form 79-1198-02)</i>

⁴ Both the Agreement and Customer Authorization (79-1151A-02) and Application (79-1151B-03) forms must have been submitted before PG&E will issue the Permission to Operation (PTO) letter. Information in the Application can be submitted by the Company or Customer in an electronic format, subject to approval by PG&E.

* Also see Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 14

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: (Cont'd.)

Rate Option	Application	Interconnection Agreement
NEMPS	For NEMPS (Special Condition 9) for projects that meet NEM Integrity requirements	
	<i>Generating Facility Interconnection Application, (Form 79-1174-03)</i>	79-1193-02- AGREEMENT AND CUSTOMER AUTHORIZATION Net Energy Metering (NEM2) Interconnection For Solar And/Or Wind Electric Generating Facilities Of 30 Kilowatts Or Less with Energy Storage of 10 Kilowatts Or Less or Energy Storage with Power Control System Certification
NEM2, NEM2EXP, NEM2A ,or NEM2MT > 1,000 kW	<i>Generating Facility Interconnection Application (Form 79-1174-03)</i>	Rule 21 Generator Interconnection Agreement for New Energy Metering (NEM-2) Generating Facilities Greater than 1,000 Kilowatts Interconnecting Under the Fast Track Process (Form 79-1198-02)
		Rule 21 Generator Interconnection Agreement (GIA) for Net Energy Metering (NEM2) Generating Facilities Greater than 1,000 Kilowatts Interconnecting Under the Independent Study, Distribution Study, or Transmission Cluster Process (Form 79-1198-02)*
NEM2MT	For customer-generators ≤ 1 MW taking service as a Multiple Tariff Facility under Special Condition 4 of this tariff:	
	<i>Generating Facility Interconnection Application (Form 79-1174-03)</i>	Generating Facility Interconnection Agreement (NEM2MT - Multiple Tariff) (Form 79-1069-02)
NEM2A	NEM2 Load Aggregation ≤ 1 MW	
	Along with the applicable interconnection form above, also submit:	
	NEM2 Load Aggregation Appendix (Form 79-1202)	
NEM2CDCR	See Special Condition 7	

* Also see Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

SPECIAL
CONDITIONS:
(Cont'd.)

3. INTERCONNECTION: (Cont'd.)

Applicant is required to verify as a part of each interconnection request for this tariff, that (i) a warranty of at least 10 years, or (ii) a 10-year service warranty or executed "agreement" ensuring proper maintenance and continued system performance has been provided on all equipment and on its installation.

For Load Aggregation Arrangements Requesting an additional service for Generator – Subject to all other applicable rules, an additional service may be allowed for the Generating Account if it has no load other than that associated directly with the REGF. However, a customer may not subsequently add load to that additional service, and if the REGF is removed, the additional service, may not be converted to a load account.

Customers on this tariff must pay for the interconnection of their REGF as provided in Electric Rule 21*, including an application fee. This application fee must be paid through PG&E's online application portal in order to complete the application, unless otherwise directed by PG&E. For application fees for Customers impacted by a Natural or Human-Made Disasters⁵, see Special Condition 10.

For the purposes of the NEM2, NEM2V, and NEM2VMSH tariffs, the rating of the generating facility, for the purposes of comparing its size relative to the 1 megawatt (MW) limit**, will be determined based on:

- (a) For each PV generator, the California Energy Commission's (CEC) AC rating;
- (b) For each inverter based generator, the gross nameplate rating of the inverter; or
- (c) For each non-inverter based generator, the generator gross nameplate.

⁵ Natural or human-made disasters includes such events as a fire, earthquake, flood, or severe storms.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission

** For the purposes of Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission, the capacity of all Generating Facilities in will be considered in counting towards the 1MW limit.

(Continued)

<i>Advice</i>	6847-E	<i>Issued by</i>	<i>Submitted</i>	January 30, 2023
<i>Decision</i>	D.22-12-056	<i>Meredith Allen</i>	<i>Effective</i>	March 1, 2023
		<i>Vice President, Regulatory Affairs</i>	<i>Resolution</i>	



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 27

SPECIAL
CONDITIONS:
(Cont'd.)

8. NEM2 Legacy Provisions

1. As of April 15, 2023, NEM customers who have completed their 20 years on Electric Schedule NEM and must be transitioned to the NEM2 rate schedule will remain on Electric Schedule NEM until NBT is operational (for residential customers, billing must be operational 12 months after December, 15, 2022 and for non-residential customers 18 months after December, 15, 2022), at which time these customers will transition to NBT at the end of their Relevant Period and will take service on the applicable OAS rates, eligible for NBT.

This Special Condition is applicable to all Customers receiving service on this NEM2 Schedule who have submitted all documentation necessary to receive service on this schedule by no later than April 14, 2023, as detailed in Special Condition 3. This Special Condition 8 does not apply to customers who have applied to interconnect under this schedule on or after April 15, 2023. Customers interconnecting under NEM2A on or after April 15, 2023, are subject to a 9-year legacy period as specified in Special Condition 6.

- a. 20-Year Transition Period. Pursuant to D.16-01-044, Customers who are receiving service on this NEM2 Schedule, or who have submitted all documentation necessary to receive service on this NEM2 Schedule, are eligible to continue receiving service on this NEM2 Schedule for a period of 20 years from the original year in which their Generating Facility was interconnected to PG&E's grid, indicated by and measured from the date on which the Customer originally received Permission To Operate (PTO) the Generating Facility from PG&E and ending at the conclusion of the Customer's applicable Relevant Period that ends immediately on or after the 20th anniversary of the original PTO date. For example, if a Customer initially received PTO on April 1, 2018, the Customer is eligible to continue receiving service on this Schedule through the conclusion of the Relevant Period ending immediately on or after March 31, 2038.

Customers served on Schedule NEM who elect to make a one-time switch (this voluntary switch should happen before the closure of NEM2) to the NEM2 Schedule prior to the conclusion of their Schedule NEM 20-year transition period can continue service under the NEM2 Schedule from the date of their original Schedule NEM PTO date; these Customers may not restart their 20-year transition period by electing to move to this Schedule. Customers electing to switch to the NEM2 Schedule prior to the conclusion of their Schedule NEM 20-year transition period permanently forfeit any of their Generating Facility's remaining transition period eligibility on Schedule NEM and may not later change back to receiving service under Schedule NEM. Customers at the end of their 20-year NEM enrollment who transitioned to the NEM2 tariff may not restart a 20-year transition period under NEM2. These customers will remain on NEM2 and will be transitioned to the Net Billing Tariff (NBT) once it is operational.

~~Customers who finished their 20-year on NEM and are transitioned to NEM2 will be transitioning to the successor tariff at the time when~~

(Continued)

Advice 6847-E
Decision D.22-12-056

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted
Effective
Resolution

January 30, 2023
March 1, 2023



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 27

~~available.~~

(Continued)

<i>Advice</i>	6847-E	<i>Issued by</i>	<i>Submitted</i>	<u>January 30, 2023</u>
<i>Decision</i>	D.22-12-056	<i>Meredith Allen</i>	<i>Effective</i>	<u>March 1, 2023</u>
		<i>Vice President, Regulatory Affairs</i>	<i>Resolution</i>	<u></u>



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 31

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage

b. Interconnection

NEM Paired Storage will have the same interconnection cost responsibility as the NEM generator that it is paired with, including charges or fees related to the interconnection application, Rule 21* engineering study/review, and/or any associated distribution upgrades.

See Section c.5. below for additional information

c. Types of NEM Paired Storage

The Renewables Portfolio Standard (RPS) Guidebook⁸ establishes two categories of energy storage that may be considered an addition or enhancement to a renewable electrical generation facility: "integrated" and "directly connected" storage.

1) ~~Integrated Storage:~~

~~Integrated Energy Storage is defined in the RPS guidelines as methods of storing energy from a renewable energy resource that are integrated into the REGF as part of the generation process.~~

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)

Advice 6847-E
Decision D.22-12-056

Issued by
Meredith Allen
Vice President, Regulatory Affairs

Submitted January 30, 2023
Effective March 1, 2023
Resolution



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 32

SPECIAL
CONDITIONS:
(Cont'd.)

- 9. NEM Paired Storage
 - c. Types of NEM Paired Storage
 - 1) Integrated Storage: ~~(Cont'd.)~~

Integrated Energy Storage is defined in the RPS guidelines as methods of storing energy from a renewable energy resource that are integrated into the REGF as part of the generation process.
 Note that, for battery-based storage, the storage device must **only** be capable of storing energy from the REGF to be considered Integrated Storage.

INTEGRATED STORAGE (By definition the storage device must only be capable of storing energy from the REGF)			
SCENARIO	Billed As	Interconnection Agreements	Interconnection Costs (Section 9.c.)
AC Coupled NEM Paired Storage Or DC Coupled NEM Paired Storage	billed as if storage and REGF were all one generator (e.g. NEMS, NEMEXP)	≤ 1 MW apply with 79-1174-03 and Interconnection agreement 79-1193-02	Per 5.i
		> 1 MW apply with 79-1174-03 and Interconnection agreement 79-1198-02*	Per 5.ii or iii

2) Directly Connected:

Directly Connected NEM Paired Storage is defined in the RPS guidelines as meeting the following requirements:

(i) The storage device is directly connected to the REGF via an internal power line (i.e., power may not be transmitted from the renewable facility to the energy storage via an external distribution line) and

(ii) The storage device must be operated as part of the NEM eligible facility.

Note that the storage device is **not** required to be exclusively charged by the REGF.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage
c. Types of NEM Paired Storage

DIRECTLY CONNECTED - Table 11.2 (This table covers storage that is NOT required to be 100% REGF charged) For Both DC and AC Coupled NEM Paired Storage						
May Include ▶ No-Grid Charged storage (if other nonrenewable generation present) ▶ Non Storage Export (if other nonrenewable generation present) Includes All ▶ Grid Charged Storage And Storage Exports All apply with Application 79-1174-03						
Includes ▶ Non-Storage Export with either NGOM or non-export relay equivalent (if no other nonrenewable generation present) All apply with Application 79-1174-03						
	PV/Wind < 30 kw	Non- PV/Wind REGF ≤1MW >30kW PV/Wind ≤1MW	REGF >1Mw*	Bill as	IC costs (Section 9.c)	NEM Integrity Requirements
DC Coupled or AC Coupled NEM Paired Storage with a PCS	Small (≤10kW) 79- 1093-02 Large (>10kW) 79- 1069-02	79-1069-02	79-1078-02	§3i	Per 5.i	Certified PCS, as defined above, required
DC Coupled or AC Coupled Small NEM Paired Storage with no PCS (≤ 10kW)	79-1093-02	79-1069-02	79-1078-02	§3ii	Per 5.i	Billed using Estimation Methodology
DC Coupled or AC Coupled Large NEM Paired Storage with no PCS sized > 10kW And ≤ 150% ¹⁰	79-1069-02	79-1069-02	79-1078-02	§3iii	Per 5.ii or iii	NGOM, No Storage Expert, or additional metering required, as described above
DC Coupled or AC Coupled Large NEM Paired Storage with no PCS sized > 10kW And > 150% ¹⁰	Set up and bill as NEMMT (not under NEM-Paired Storage section)					

¹⁰ the storage system shall have a maximum output power no larger than 150% of the NEM-eligible generator's maximum output capacity. Pursuant to Decision 20-06-017 the maximum output capacity limit shall not apply for a period of 3 years starting on August 16, 2020. [This deadline was extended to August 16, 2025 based on a Request for Extension of Time filed on September 5, 2023.](#)

* [See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission](#)

(Continued)



**ELECTRIC SCHEDULE NEM2
NET ENERGY METERING SERVICE**

Sheet 38

SPECIAL
CONDITIONS:
(Cont'd.)

9. NEM Paired Storage (Cont'd.)

c. Types of NEM Paired Storage

5) NEM Paired Storage Interconnection Cost Responsibility

For the purpose of determining if a NEM Paired Storage REGF exceeds 1 MW criterion, refer to the sizing definition included in the AC-Coupled and DC-Coupled definition at the beginning of this Special Condition.

- (i) NEM Paired Storage REGF < 1 MW - The storage will have the same interconnection cost responsibility as the NEM-eligible GF that it is paired with for a REGF less than or equal to 1 MW.
- (ii) NEM Paired Storage REGF > 1 MW - The storage will have the same interconnection cost responsibility as the NEM generator that it is paired with for a REGF greater than 1 MW
- (iii) In the event the storage is added at a later date after the permission to operate of the NEM-eligible GF it is subsequently paired with, the storage applicant will be required to pay the same interconnection fees and costs that the NEM-eligible GF would be required to pay, as provided in Electric Rule 21*.

d. Storage Size Dependent Requirements

Requirements differ depending on the size of the NEM Paired Storage and whether it is paired with a solar generator or not. The storage device size is determined by the inverter alternating current nameplate rating.

* See Rule 21 Section B.1 Applicability regarding NEM-2 projects greater than 1 MW interconnecting on Transmission.

(Continued)

**PG&E Gas and Electric
Advice Submittal List
General Order 96-B, Section IV**

AT&T
Albion Power Company

Alta Power Group, LLC
Anderson & Poole

Atlas ReFuel
BART
Buchalter
Barkovich & Yap, Inc.
Braun Blaising Smith Wynne, P.C.
California Community Choice Association
California Cotton Ginners & Growers
Assn California Energy Commission

California Hub for Energy Efficiency
Financing

California Alternative Energy and
Advanced Transportation Financing
Authority
California Public Utilities Commission
Calpine

Cameron-Daniel, P.C.
Casner, Steve
Center for Biological Diversity

Chevron Pipeline and Power
City of Palo Alto

City of San Jose
Clean Power Research
Coast Economic Consulting
Commercial Energy
Crossborder Energy
Crown Road Energy, LLC
Davis Wright Tremaine LLP
Day Carter Murphy

Dept of General Services
Don Pickett & Associates, Inc.
Douglass & Liddell
Downey Brand LLP
Dish Wireless L.L.C.

East Bay Community Energy Ellison
Schneider & Harris LLP

Electrical Power Systems, Inc.
Fresno
Engineers and Scientists of California

GenOn Energy, Inc.
Green Power Institute
Hanna & Morton
ICF

iCommLaw
International Power Technology
Intertie

Intestate Gas Services, Inc.

Johnston, Kevin
Kelly Group
Ken Bohn Consulting
Keyes & Fox LLP
Leviton Manufacturing Co., Inc.

Los Angeles County Integrated
Waste Management Task Force
MRW & Associates
Manatt Phelps Phillips
Marin Energy Authority
McClintock IP
McKenzie & Associates

Modesto Irrigation District
NRG Solar

OnGrid Solar
Pacific Gas and Electric Company
Peninsula Clean Energy

Pioneer Community Energy

Public Advocates Office

Redwood Coast Energy Authority
Regulatory & Cogeneration Service, Inc.

Resource Innovations

SCD Energy Solutions
San Diego Gas & Electric Company

SPURR
San Francisco Water Power and Sewer
Sempra Utilities

Sierra Telephone Company, Inc.
Southern California Edison Company
Southern California Gas Company
Spark Energy
Sun Light & Power
Sunshine Design
Stoel Rives LLP

Tecogen, Inc.
TerraVerde Renewable Partners
Tiger Natural Gas, Inc.

TransCanada
Utility Cost Management
Utility Power Solutions
Water and Energy Consulting Wellhead
Electric Company
Western Manufactured Housing
Communities Association (WMA)
Yep Energy